
POOJA POWER PRODUCTS



Part of **Easy** series

EasyPact TVS

Motor starters from 6 to 630A

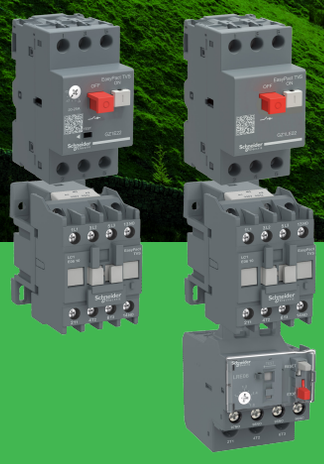

Catalog 2020

https://www.se.com

Life Is On | Schneider Electric


90 years of leadership in motor starter technology

EasyPact TVS provide you **Essential** control & protection for your applications:

HVAC



GenSet

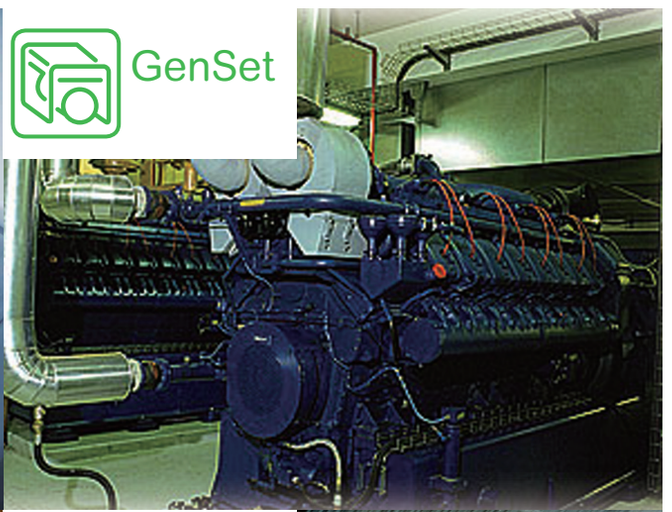

Pumps



Textile



Material Handling





Packaging




2 principles to build your starter solution


2-components solution
(Thermal-magnetic circuit breaker + Contactor)

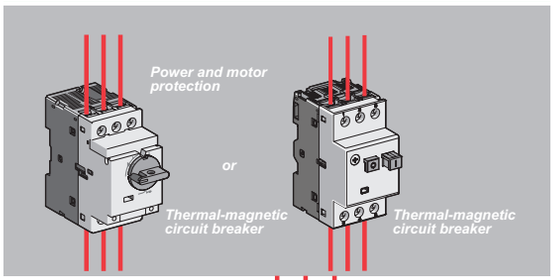

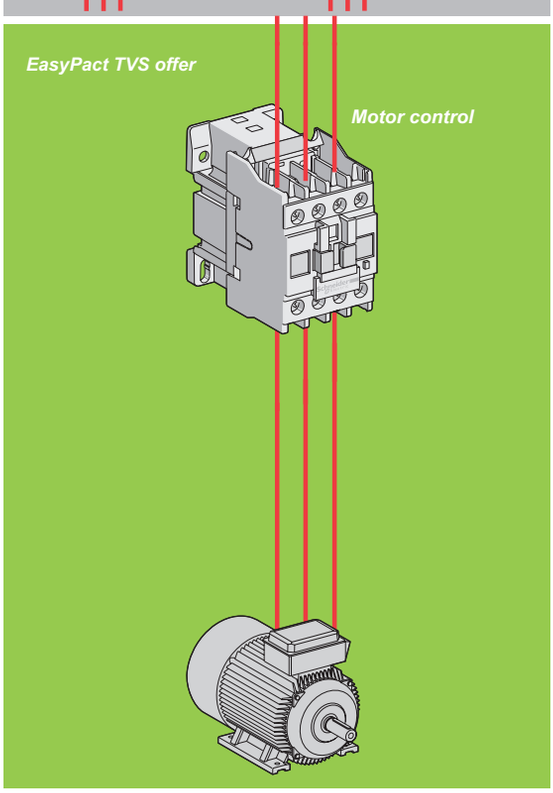


3-components solution
(Magnetic circuit breaker or fuse + Contactor + TOR)

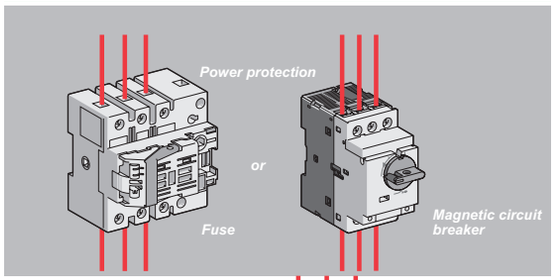


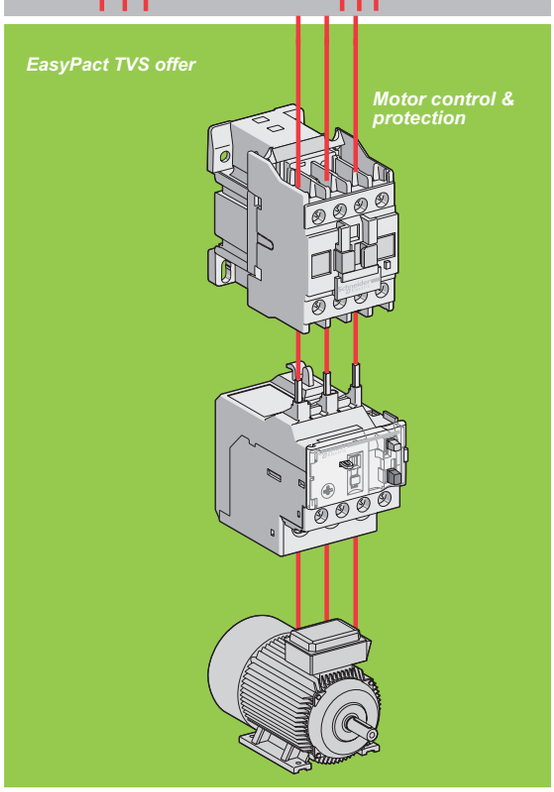

To build the essential solutions in an easy and simple way


Control






Terminal block

Reverser starter





Star-Delta solution

Designed for the essential

> Easy choice for simple applications

General contents

EasyPact TVS contactors 6 A to 630 A — A

EasyPact TVS thermal overload relays 0.1 A to 630 A — B

EasyPact TVS control relays 4 NO/NC contacts — C

EasyPact TVS motor protection circuit breaker 0.1A to 32A — D

Coordination between protection and control components — E

EasyPact TVS

CPB100417




CPB100430



> EasyPact TVS contactors,
6 A to 630 A

CPB100434




> EasyPact TVS thermal overload relays
0.1 A to 630 A

CPB100425



> EasyPact TVS control relays
4 NO/NC contacts

CPB100407



> EasyPact TVS motor protection circuit
breaker 0.1A to 32A

> Coordination between protection
and control components

> Glossary, definitions, technical information

Control your motors, Do It Yourself simply your solution: direct-on-line starter, reversing starter, star-delta starter

- 3 pole & 4 pole Characteristics ▶ A-1
- Accessories, spare parts ▶ A-17
- Dimensions, mounting ▶ A-26

Footprint for complete compatibility with contactors (direct mounting under contactors)

- Characteristics ▶ B-1
- Dimensions, mounting ▶ B-7

Pilot your control circuits

- Characteristics ▶ C-1
- Dimensions, mounting ▶ C-4

- Presentation ▶ D-3
- Characteristics ▶ D-5
- References ▶ D-7
- Dimensions, mounting ▶ D-12

Better continuity of service

- What coordination means ▶ E-1
- Glossary ▶ E-5
- Definitions ▶ E-6
- Technical informations ▶ E-7

EasyPact TVS 3-pole contactors







Size		1					2		3		
Rated operational current AC-3	**A**	6	9	12	18	25	32	38	40	50	65
Rated operational current AC-1	**A**	20	25		32	36	50		60	70	80
Rated operational power in AC-3 **220/230 V**	**kW**	1.1	2.2	3	4	5.5	7.5	9	11	15	18.5
380/400 V		2.2	4	5.5	7.5	11	15	18.5	18.5	22	30
415/440 V		2.2	4	5.5	9	11	15	18.5	22	25/30	37
500 V		3	5.5	7.5	10	15	18.5	18.5	22	30	37
660/690 V		3	5.5	7.5	10	15	18.5	18.5	30	33	37
Width	**mm**	45				45.5	56		75		
Coil rated operating voltage		24...440 V AC according to the coil voltage code (see below)									
Auxiliary built in contact		1 NO or 1 NC							1 NO + 1 NC		
References (1)		**LC1E06**	**LC1E09**	**LC1E12**	**LC1E18**	**LC1E25**	**LC1E32**	**LC1E38**	**LC1E40**	**LC1E50**	**LC1E65**

(1) Partial, see below.

Coil voltage code for 3-pole contactors

		24	48	110	220	230	240	380	415	440
LC1E06-300	50 Hz	B5	E5	F5	M5	-	U5	Q5	N5	R5
	60 Hz	B6	-	F6	M6	-	-	Q6	-	R6
LC1E06-95	50/60Hz	B7	E7	F7	M7	P7	-	Q7	-	-
LC1E400-630	50/60Hz	-	E7	F7	M7	-	U7	Q7	N7	-

Contactor: how to determine the full commercial reference ?

Example:

LC1E	12	10	U	5	**ref. LC1E1210U5**
				5	50 Hz
			U	Coil voltage code	240 V
		10		Auxiliary contact configuration (2)	01 1NC 10 1NO
	12			Rated operation current AC3	12 A
LC1E				Contactor	EasyPact TVS

(2) Example up to LC1E38 For details, please consult page A-3.

from 6 to 630 A

 CPB100420		 CPB100421		 CPB100415		 CPB100416		 CPB100409	
4		5		6		7		8	9
80	95	120	160	200	250	300	400	500	630
110	120	150	200	250	300	320	500	700	1000
22	25	37	45	55	75	90	110	147	185
37	45	55	75	90	132	160	200	250	335
45	45	59	80	100	140	160/185	220/250	280/295	375/400
45	55	75	90	110	160	200	257	355	400
45	45	80	100	110	160	220	280	335	450
85		120		168.5		213	213	233	309
1 NO + 1 NC				-		-			
LC1E80	**LC1E95**	**LC1E120**	**LC1E160**	**LC1E200**	**LC1E250**	**LC1E300**	**LC1E400**	**LC1E500**	**LC1E630**

Common characteristics

> Contactors compatible with:


LAEN● auxiliary contact blocks
(see page A-20)


LAETSD time delay auxiliary contact (from 25 A contactor)
(see page A-20)


LAERC●● RC switch suppressor (up to 95 A)
(see page A-19)


LAEM● mechanical interlock
(see page A-19)


LAEP● set of power connections (up to 95 A)
(see page A-19)

Utilisation categories

> Class AC-1: AC loads with cos φ at least equal to 0.95 (resistive load, heating, distribution, etc.).

> Class AC-3: squirrel-cage motors with breaking taking place with the motor running.

Commercial reference numbering system



Frequency	Code
50 Hz	5
60 Hz	6
50/60 Hz	7

Coil voltage (1)	Code
24 V	B
48 V	E
110 V	F
220 V	M
230 V	P
240 V	U
380 V	Q
400 V	V
415 V	N
440 V	R

(1) For 3-pole contactors, please refer to page A-1.
For 4-pole contactors, please refer to page A-4.

Rated operation current (AC3)	Auxiliary contact configuration	Code
EasyPact TVS 3-pole		
06...38	1NO (or 1 NC)	10 (or 01)
40...160	1NO+1NC	none
200...630	no auxiliary contact	none
Rated operation current (AC3)	**Main contact**	**Code**
EasyPact TVS 4-pole		
06...95	4 NO	004
06...95	2 NO + 2 NC	008

Rated operation current (AC3)	Code
EasyPact TVS 3-pole	
06...630	06...630
EasyPact TVS 4-pole	
06...95	06...95

Type	Designation
Contactor	EasyPact TVS

Contactor: how to determine the full commercial reference ?

Example 1: you need a 32 A contactor, 1 NC auxiliary contact, 24 V - 50 Hz coil ⇨ **LC1E3201B5**
Example 2: you need a 120 A contactor, 1 NC + NO auxiliary contact, 220 V - 50 Hz coil ⇨ **LC1E120M5**

EasyPact TVS 4-pole contactors from 6 to 95 A









Size		1				2			3		4	
Rated operational current AC-3	**A**	6	9	12	18	25	32	38	40	65	80	95
Rated operational current AC-1	**A**	16	20	25	32	40	45	60	60	80	100	125
Width	**mm**	45				56			84.5		95.5	
Coil rated operating voltage		24...415 V AC according to the coil voltage code (see below)										
Auxiliary built in contact		no built in contact										
References (1)		**LC1E06**	**LC1E09**	**LC1E12**	**LC1E18**	**LC1E25**	**LC1E32**	**LC1E38**	**LC1E40**	**LC1E65**	**LC1E80**	**LC1E95**

(1) Partial, see below.

Coil voltage code for 4-pole contactors

		24	48	110	220	230	240	380	400	415
LC1E06-95	50/60Hz	B7	E7	F7	M7	P7	U7	Q7	V7	N7

Common characteristics

> Contactors compatible with:



LAEN● auxiliary contact blocks (see page A-20)



LAETSD time delay auxiliary contact (from 25 A contactor) (see page A-20)



LAERC●● RC switch suppressor (up to 95 A) (see page A-19)

Contactor: how to determine the full commercial reference ?

Example:

LC1E | 12 | 004 | B | 7

	ref. LC1E12004B7
7	50/60Hz
Coil voltage code	24V
Main Contact	004 4NO 008 2NO+2NC
Rated operation current AC3	12 A
Contactor	EasyPact TVS

Example 1: you need a 32 A contactor, 4 NO contact, 24 V - 50/60Hz coil ⇨ **LC1E32004B7**

Example 2: you need a 95A contactor, 2NO+2NC contact, 220 V - 50/60Hz coil ⇨ **LC1E95008M7**

EasyPact TVS 3-pole contactors
6 to 630 A
Power characteristics

Power circuit connections

Contactor type				LC1E06	LC1E09	LC1E12	LC1E18
Number of poles				3			
Rated operational current (Ie) (Ue ≤ 440 V)		In AC-3 (θ ≤ 55 °C)	A	6	9	12	18
		In AC-3 (θ ≤ 55 °C)					
		In AC-1 (θ ≤ 55 °C)		20	25		32
		In AC-1 (θ ≤ 40 °C)		–			
Rated operational voltage (Ue)		Up to	V	690			
Frequency limits		Of the operational current	Hz	50 or 60			
Conventional thermal current (Ith)		θ ≤ 55 °C	A	20	25		32
		θ ≤ 40 °C		–			
Rated breaking capacity at 440 V		Conforming to IEC 60947	A	48	72	96	144
Rated making capacity at 440 V		Conforming to IEC 60947-4-1	A	60	90	120	180
Permissible short time rating No current flowing for preceding 15 minutes with θ ≤ 40 °C		10 s	A	80	105		145
		1 min		45	61		84
		10 min		20	30		40
Maximum permissive current No current flowing for previous 60 minutes, at θ ≤ 40 °C		For 10 s	A	–			
Protection by fuses against short-circuits (U ≤ 690 V)	Without thermal overload relay gG fuse	Type 1	A	12	20	25	35
	With thermal overload relay			For corresponding aM or gG fuse ratings corresponding to the associated LRE● thermal overload relay, please see page B-3			
Average impedance per pole		At Ith and 50 Hz	mΩ	2.5			
Power dissipation per pole for the above operational currents		AC-3	W	0.09	0.20	0.36	0.81
		AC-1		1.0	1.6		2.6
Electrical durability		AC-3 (Ue ≤ 440 V)	Million cycles	1.4			1.2
		AC-1 (Ue ≤ 440 V)		0.15		0.3	
Mechanical durability				10			

Power circuit connections

Connection maximum c.s.a.							
	Flexible cable with cable end	1 conductor	mm²	1...4			
		2 conductors		1...2.5			
	Flexible cable without cable end	1 conductor	mm²	1...4			1.5...6
		2 conductors		1...4			1.5...6
	Solid cable without cable end	1 conductor	mm²	1...4			1.5...6
		2 conductors		1...4			1.5...6
	Cable with lug		mm	–			
	Bar	Number of bars		–			
		Bar	mm x mm	–			
	Bolt diameter	1 conductor	mm	–			
Tightening torque		Power circuit connection	N.m	1.2			
Tool				Philips N°2 or Ø6mm flat			

	LC1E25	LC1E32	LC1E38	LC1E40	LC1E50	LC1E65	LC1E80	LC1E95	LC1E120	LC1E160	LC1E200	LC1E250	LC1E300	LC1E400	LC1E500	LC1E630
	25	32	38	40	50	65	80	95	–							
									120	160	200	250	300	400	500	630
	36	50		60	70	80	110	120	–							
									150	200	250	300	320	500	700	1000
														50/60		
	36	50		60	70	80	110	120	–							
									150	200	250	300	320	500	700	1000
	200	256	304	320	400	520	640	760	960	1280	1600	2000	2400	3200	4000	5040
	250	320	380	400	500	650	800	950	1200	1600	2000	2500	3000	4000	5000	6300
	240	260	310	320	400	520	640	800	950	1200	1500	1800	2650	3600	4200	5050
	120	138	150	165	208	260	320	400	550	580	740	850	1300	1700	2400	3400
	50	60		72	84	110	135		250	250	400	440	750	1000	1200	1600
									1100	1400	1500	1800	2200	3600	4200	5050
	40	63		80	100	125	160		250	315			500	630	800	800
									–							
	2.5			1.5		1	0.8		0.6		0.33	0.32	0.3	0.26	0.18	0.12
	1.6	2.0	2.9	2.4	3.8	4.2	5.1	7.2	8.6	15	13	20	27	42	45	48
	3.2	5.0		5.4	7.4	6.4	9.7	12	14	24	21	29	31	65	88	120
		1	0.9						0.8		0.5	0.7	0.5	0.6	0.6	0.6
	0.35								0.25		0.2		0.4	0.25	0.25	0.2
		8		5			3		4		5			4	4	4
	1...6			2.5...25			4...50		10...120		–					
	1...4			2.5...10			4...16		10...120 + 10...50		–					
		1.5...10		2.5...25			4...50		10...120		–					
		1.5...6		2.5...16			4...25		10...120 + 10...50		–					
		1.5...10		2.5...25			4...50		10...120		–					
		1.5...6		2.5...16			4...25		10...120 + 10...50		–					
											150	185	240	2 x 150	2 x 240	–
											2					
											3 x 25	4 x 32	5 x 30	30 x 5	40 x 5	60 x 5
											M8	M10				M12
	1.5	2.1		5			12		12		18	35				58
				Ø8mm flat			Allen key n°4		Allen key n°4		Wrench					

EasyPact TVS 4-pole contactors
6 to 95 A
Power characteristics

Power circuit connections

Contactor type				LC1E06	LC1E09	LC1E12	LC1E18
Number of poles				4			
Rated operational current (Ie) (Ue ≤ 415 V)		In AC-3 (θ ≤ 60 °C)	A	6	9	12	18
		In AC-1 (θ ≤ 60 °C)		16	20	25	32
Rated operational voltage (Ue)		Up to	V	690			
Frequency limits		Of the operational current	Hz	50/60			
Conventional thermal current (Ith)		θ ≤ 60 °C	A	16	20	25	32
Rated breaking capacity at 440 V		Conforming to IEC 60947	A	48	72	96	144
Rated making capacity at 440 V		Conforming to IEC 60947-4-1	A	60	90	120	180
Permissible short time rating No current flowing for preceding 15 minutes with θ ≤ 40 °C		10 s	A	80	105		145
		1 min		45	61		84
		10 min		20	30		40
Maximum permissive current No current flowing for previous 60 minutes, at θ ≤ 40 °C		For 10 s	A	–			
Protection by fuses against short-circuits (U ≤ 690 V)	Without thermal overload relay gG fuse	Type 1	A	12	20	25	35
	With thermal overload relay			For corresponding aM or gG fuse ratings corresponding to the associated LRE● thermal overload relay, please see page B-3			
Average impedance per pole		At Ith and 50 Hz	mΩ	2.5			
Power dissipation per pole for the above operational currents		AC-1	W	1.0	1.6		2.6
Electrical durability		AC-1 (Ue ≤ 440 V)	Million cycles	0.15		0.3	
Mechanical durability				10			

Power circuit connections

Connection maximum c.s.a.							
	Flexible cable with cable end	1 conductor	mm^2	1...4			
		2 conductors		1...2.5			
	Flexible cable without cable end	1 conductor	mm^2	1...4			1.5...6
		2 conductors		1...4			1.5...6
	Solid cable without cable end	1 conductor	mm^2	1...4			1.5...6
		2 conductors		1...4			1.5...6
	Cable with lug		mm	–			
	Bar	Number of bars		–			
		Bar	mm x mm	–			
	Bolt diameter	1 conductor	mm	–			
Tightening torque		Power circuit connection	N.m	1.2			
Tool				Philips N°2 or Ø6mm flat			

	LC1E25	LC1E32	LC1E38	LC1E40	LC1E65	LC1E80	LC1E95
	25	32	38	40	65	80	95
	40	45	60	60	80	100	125
	40	45	60	60	80	100	125
	200	256	304	320	520	640	760
	250	320	380	400	650	800	950
	240	260	310	320	520	640	800
	120	138	150	165	260	320	400
	50	60		72	110	135	
	40	63		80	125	160	
	2.5			1.5	1	0.8	
	3.2	5.0	5.4	5.4	6.4	9.7	12
	0.35						
		8		5		3	
	1...6			2.5...25		4...50	
	1...4			2.5...10		4...16	
	1.5...10			2.5...25		4...50	
	1.5...6			2.5...16		4...25	
	1.5...10			2.5...25		4...50	
	1.5...6			2.5...16		4...25	
	1.5	2.1		5		12	
				Ø8mm flat		Allen key n°4	

EasyPact TVS 3-pole contactors
6 to 630 A
Control circuit: coil characteristics
Built in auxiliary contact

Control circuit: coil characteristics with a.c. supply							
Contactor type				**LC1E06**	**LC1E09**	**LC1E12**	**LC1E18**
Rated control circuit voltage (Uc) 50/60 Hz			**V**	24...440 according coil voltage code			
Control voltage limits (θ ≤ 55 °C)							
50 Hz or 60 Hz coils	Operational			0.85...1.1 Uc			
	Drop-out			0.3...0.6 Uc			
Average consumption at 20°C and at Uc							
∿ 50 Hz coils	Inrush	coil	**VA**	95			
		cos φ		0.75			
	Sealed	coil	**VA**	8.5			
		cos φ		0.3			
∿ 60 Hz coils	Inrush	coil	**VA**	95			
		cos φ		0.75			
	Sealed	coil	**VA**	8.5			
		cos φ		0.3			
Heat dissipation			**W**	2...3			
Operating time	Closing "C"		**ms**	12...22			
	Opening "O"			4...19			
Maximum operating rate at ambiant temperature ≤ 60 °C			**In operating cycles per hour**	1800			
Maximum operating rate at ambiant temperature ≤ 55 °C							
Control circuit connections							
Connection maximum c.s.a.							
Flexible cable without cable end	1 or 2 conductors		**mm²**	1...4			
Flexible cable with cable end	1 conductor		**mm²**	1...4			
	2 conductors			1...2.5			
Solid cable without cable end	1 or 2 conductors		**mm²**	1...4			
Tightening torque			**N.m**	1.2			
Screwdriver				Philips N° 2 - Ø6 mm flat			
Built in auxiliary contact							
Contacts conforming to	IEC 60947-5-1			LC1E06...E38: contactor's own 1NO or 1NC LC1E40...E160: contactor's own 1NO and 1NC			
Rated operational voltage (Ue)	Up to		**V**	690			
Rated insulation voltage (Ui)	Conforming to IEC 60947-1			690			
Conventional thermal current (Ith)	Ambient air temperature ≤ 60 °C		**A**	10			
Operating current frequency			**Hz**	50 or 60			
Minimum switching capacity $\lambda = 10^{-8}$	U min		**V**	17			
	I min		**mA**	5			
Short-circuit protection	Conforming to IEC 60947-5-1			gG fuse: 10 A			
Raked making capacity	Conforming to IEC 60947-5-1		**A**	∿: 140			
Short-time rating	Permissible for	1 s	**A**	100			
		500 ms		120			
		100 ms		140			
Insulation resistance			**mΩ**	>10			
Non-overlap time	Guaranteed between N/C and N/O contacts		**ms**	1.5 on energisation and on de-energisation			

	LC1E25	LC1E32	LC1E38	LC1E40	LC1E50	LC1E65	LC1E80	LC1E95	LC1E120	LC1E160	LC1E200	LC1E250	LC1E300	LC1E400	LC1E500	LC1E630
									24...440 according coil voltage code							
									0.85…1.1 Uc							
									0.35...0.55 Uc					0.3...0.5 Uc		0.25...0.5 Uc
	95			160			200		300		805		650	1075	1100	1650
									0.8	0.9	0.3		0.9	0.9	0.9	0.9
	8.3			15			20		22		55		10	15	18	22
									0.3	0.9	0.3		0.9	0.9	0.9	0.9
	95			140			220		300		970		650	1075	1100	1650
									0.8	0.9	0.3		0.9	0.9	0.9	0.9
	8.3			13			22		22		66		10	15	18	22
										0.9	0.3		0.9	0.9	0.9	0.9
				6...10					3...8		18...24		8	14	18	20
				20...26			20...35		20...50		20...35		40...65	40…75		40…80
				8...12			6...20		6...20		7...15		100...170	100…170		100…200
				1200					1200					2400		1200
									1...2.5		1...4			1...4	1...4	1...4
									1...2.5					1...4	1...4	1...4
														1...2.5	1...2.5	1...2.5
									1...2.5		1...4			1...4	1...4	1...4
				1.2					1.2					1.2	1.2	1.2
														50/60		


EasyPact TVS 4-pole contactors
6 to 95 A
Control circuit: coil characteristics
Built in auxiliary contact

Control circuit: coil characteristics with a.c. supply								
Contactor type					**LC1E06**	**LC1E09**	**LC1E12**	**LC1E18**
Rated control circuit voltage (Uc) 50/60 Hz				**V**	24...415 according coil voltage code			
Control voltage limits (θ ≤ 55 °C)								
	50/60 Hz coils	Operational			0.85...1.1 Uc			
		Drop-out			0.3...0.6 Uc			
Average consumption at 20°C and at Uc								
	∿ 50 Hz coils	Inrush	coil	**VA**	95			
			cos φ		0.75			
		Sealed	coil	**VA**	8.5			
			cos φ		0.3			
	∿ 60 Hz coils	Inrush	coil	**VA**	95			
			cos φ		0.75			
		Sealed	coil	**VA**	8.5			
			cos φ		0.3			
Heat dissipation				**W**	2.3			
Operating time		Closing "C"		**ms**	12...22			
		Opening "O"			4...19			
Maximum operating rate at ambiant temperature ≤ 60 °C				**In operating cycles per hour**	1800			
Maximum operating rate at ambiant temperature ≤ 55 °C					-			
Control circuit connections								
Connection maximum c.s.a.								
	Flexible cable without cable end	1 or 2 conductors		**mm²**	1...4			
	Flexible cable with cable end	1 conductor		**mm²**	1...4			
		2 conductors			1...2.5			
	Solid cable without cable end	1 or 2 conductors		**mm²**	1...4			
Tightening torque				**N.m**	1.2			
Screwdriver					Philips N° 2 - Ø6 mm flat			

	LC1E25	LC1E32	LC1E38	LC1E40	LC1E50	LC1E65	LC1E80	LC1E95
	95			160			200	
	8.3			15			20	
	95			140			220	
	8.3			13			22	
				6...10				
				20...26			20...35	
				8...12			6...20	
				1200				
				1.2				

EasyPact TVS 3-pole contactors
6 to 630 A

Environment

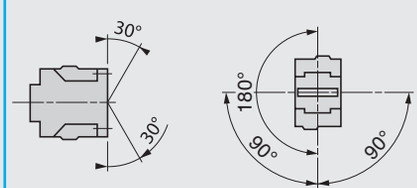Contactor type				LC1E06...E18	LC1E25...E38
Rated insulation voltage (Ui)	Conforming to IEC 60947-4-1, overvoltage category III, degree of pollution: 3		V	690	
Rated impulse withstand voltage (Uimp)	Conforming to IEC 60947		kV	6	
Conforming to standards				IEC 60947-4-1, IEC 60947-5-1	
Product certifications				EAC, CE	
Degree of protection (front face only)	Conforming to IEC 60529			Protection against direct finger contact IP2X	
Protective treatment	Conforming to IEC 60068-2-30			IEC60068-2-30 Test Db, Variant 2	
Ambiant air temperature around the device	Storage		°C	-60...+80	
	Operation			-5...+55	
	Permissible at UC (1)			-20...+70	
Maximum operating altitude	Without derating		m	3000	
Operating positions	Without derating			±30° in relation to normal vertical mounting plane 	
Flame resistance	Conforming to IEC 60695-2-1		°C	850	
Shock resistance (2)	Conforming to	Contactor open		7 gn	6 gn
1/2 sinewave = 11 ms	IEC 60068-2-7	Contactor closed		10 gn	
Vibration resistance (2)	Conforming to	Contactor open		1.5 gn	
5...300 Hz	IEC 60068-2-6	Contactor closed		3 gn	

(1) Derating see page E-4.
(2) Without change of contact states, in the most unfavorable direction (coil energised at Ue).

Installation recommandations





Avoid fire, product damage or power loss with a safe enclosure


Severe conditions such as dust, humidity, high temperature can result in people or equipments exposed to serious risks if the suitable protection of the electrical components is not taken.

Spacial CRN steel enclosures is one of our solutions
A complete offer with 39 dimensions from 200 x 200 x 150 mm to 1000 x 800 x 300 mm:
- with plain door, without plain mounting plate
- with plain door and plain mounting plate
- with glazed door, without plain mounting plate.

- Degree of protection IP 66.
- Compliance with standard IEC 62208.
- A wide range of accessories to fit to all your applications.


Spacial CRN, suitable for any application
Indoors with harsh and dirty environments like machines, manufacturing plants, and logistic centers.

Specific optional devices re-enforce the protection: fans, filters.

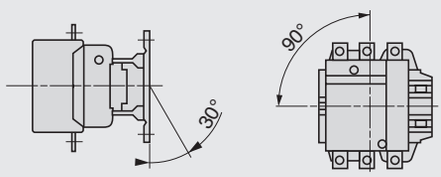	LC1E40...E65	LC1E80...E95	LC1E120...E160	LC1E200...E300	LC1E400	LC1E500	LC1E630
			8				
				IEC 60947-4-1			
				IP00			
				–			
							
					6gn	9gn	6gn
	7 gn				15gn		
					1.5gn	2gn	
					5gn	4gn	

EasyPact TVS 4-pole contactors
6 to 95 A

Environment

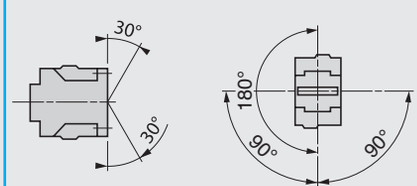Contactor type				LC1E06...E18	LC1E25...E38
Rated insulation voltage (Ui)	Conforming to IEC 60947-4-1, overvoltage category III, degree of pollution: 3		V	690	
Rated impulse withstand voltage (Uimp)	Conforming to IEC 60947		kV	6	
Conforming to standards				IEC 60947-4-1, IEC 60947-5-1	
Product certifications				EAC, CE	
Degree of protection (front face only)	Conforming to IEC 60529			Protection against direct finger contact IP2X	
Protective treatment	Conforming to IEC 60068-2-30			IEC60068-2-30 Test Db, Variant 2	
Ambiant air temperature around the device	Storage		°C	-60...+80	
	Operation			-5...+55	
	Permissible at UC (1)			-20...+70	
Maximum operating altitude	Without derating		m	3000	
Operating positions	Without derating			±30° in relation to normal vertical mounting plane 	
Flame resistance	Conforming to IEC 60695-2-1		°C	850	
Shock resistance (2)	Conforming to	Contactor open		7 gn	6 gn
1/2 sinewave = 11 ms	IEC 60068-2-7	Contactor closed		10 gn	
Vibration resistance (2)	Conforming to	Contactor open		1.5 gn	
5...300 Hz	IEC 60068-2-6	Contactor closed		3 gn	

(1) Derating see page E-4.
(2) Without change of contact states, in the most unfavorable direction (coil energised at Ue).

Installation recommandations





Avoid fire, product damage or power loss with a safe enclosure

Severe conditions such as dust, humidity, high temperature can result in people or equipments exposed to serious risks if the suitable protection of the electrical components is not taken.

Spacial CRN steel enclosures is one of our solutions
A complete offer with 39 dimensions from 200 x 200 x 150 mm to 1000 x 800 x 300 mm:
- with plain door, without plain mounting plate
- with plain door and plain mounting plate
- with glazed door, without plain mounting plate.

- Degree of protection IP 66.
- Compliance with standard IEC 62208.
- A wide range of accessories to fit to all your applications.

Spacial CRN, suitable for any application
Indoors with harsh and dirty environments like machines, manufacturing plants, and logistic centers.

Specific optional devices re-enforce the protection: fans, filters.

	LC1E40...E65	LC1E80...E95
	7 gn	

EasyPact TVS 3-pole contactors
EasyPact TVS contactors for motor control up to 335 kW at 400 V, in category AC-3

CPB100417



LC1E06

CPB100419



LC1E65

CPB100421



LC1E120

CPB100416



LC1E300

3-pole contactors

Standard power ratings of 3-phase motors 50/60 Hz in category AC-3					Rated operational current at 440V (AC-3) up to	Instantaneous auxiliary contacts		Basic reference, to be completed by adding the control voltage code	Weight
220 V	380 V	415V		660V					
230 V	400 V	440V	500 V	690 V				Fixing [1]	
kW	kW	kW	kW	kW	A				kg
Connection by screw clamp terminals									
1.1	2.2	2.2	3	3	**6**	1	0	**LC1E0610●●**	0.300
1.1	2.2	2.2	3	3	**6**	0	1	**LC1E0601●●**	0.300
2.2	4	4	5.5	5.5	**9**	1	0	**LC1E0910●●**	0.300
2.2	4	4	5.5	5.5	**9**	0	1	**LC1E0901●●**	0.300
3	5.5	5.5	7.5	7.5	**12**	1	0	**LC1E1210●●**	0.300
3	5.5	5.5	7.5	7.5	**12**	0	1	**LC1E1201●●**	0.300
4	7.5	9	10	10	**18**	1	0	**LC1E1810●●**	0.300
4	7.5	9	10	10	**18**	0	1	**LC1E1801●●**	0.300
5.5	11	11	15	15	**25**	1	0	**LC1E2510●●**	0.360
5.5	11	11	15	15	**25**	0	1	**LC1E2501●●**	0.360
7.5	15	15	18.5	18.5	**32**	1	0	**LC1E3210●●**	0.450
7.5	15	15	18.5	18.5	**32**	0	1	**LC1E3201●●**	0.450
9	18.5	18.5	18.5	18.5	**38**	1	0	**LC1E3810●●**	0.450
9	18.5	18.5	18.5	18.5	**38**	0	1	**LC1E3801●●**	0.450
11	18.5	22	22	30	**40**	1	1	**LC1E40●●**	0.980
15	22	25/30	30	33	**50**	1	1	**LC1E50●●**	0.980
18.5	30	37	37	37	**65**	1	1	**LC1E65●●**	0.980
22	37	45	45	45	**80**	1	1	**LC1E80●●**	1.520
25	45	45	55	45	**95**	1	1	**LC1E95●●**	1.520
37	55	59	75	80	**120**	1	1	**LC1E120●●**	2.300
45	75	80	90	100	**160**	1	1	**LC1E160●●**	2.300
Connection by bars									
55	90	100	110	110	**200**	0	0	**LC1E200●●**	4.600
75	132	140	160	160	**250**	0	0	**LC1E250●●**	4.700
90	160	160/185	200	220	**300**	0	0	**LC1E300●●**	8.500
110	200	220/250	257	280	**400**	0	0	**LC1E400●●**	9.1
147	250	280/295	355	335	**500**	0	0	**LC1E500●●**	11.35
185	335	375/400	400	450	**630**	0	0	**LC1E630●●**	18.6

Coil voltage code for 3-pole contactors

		24	48	110	220	230	240	380	415	440
LC1E06-300	50 Hz	B5	E5	F5	M5	-	U5	Q5	N5	R5
	60 Hz	B6	-	F6	M6	-	-	Q6	-	R6
LC1E06-95	50/60Hz	B7	E7	F7	M7	P7	-	Q7	-	-
LC1E400-630	50/60Hz	-	E7	F7	M7	-	U7	Q7	N7	R7

Seperate components

Auxiliary contact blocks, add-on modules and accessories, see pages A-20 to A-21.

Coil spare parts

For maintenance, each coil can be ordered separatly, see page A-22 to A-26.

(1) LC1E06 to E65: clip-on mounting on 35 mm ⊐ rail AM1 DP or screw fixing.
LC1E80 to E95: clip-on mounting on 35 mm ⊐ rail AM1DP or 75 mm ⊐ rail AM1 DL or screw fixing.
LC1E120 and E160: clip-on mounting on 2 x 35 mm ⊐ rail AM1 DP or screw fixing.

EasyPact TVS 4-pole contactors

EasyPact TVS contactors for motor control in category AC-1, 16 to 125A

CPB100430



LC1E06

CPB100432



LC1E65

4-pole contactors

Non inductive loads maximum current (θ≤55°C) utilisation category AC-1	number of poles		Basic reference, to be completed by adding the controy voltage code(1)	weight (3)
			Fixing(1)	kg
16	4	-	**LC1E06004●●**	0.34
	2	2	**LC1E06008●●**	0.34
20	4	-	**LC1E09004●●**	0.34
	2	2	**LC1E09008●●**	0.34
25	4	-	**LC1E12004●●**	0.34
	2	2	**LC1E12008●●**	0.34
32	4	-	**LC1E18004●●**	0.34
	2	2	**LC1E18008●●**	0.34
40	4	-	**LC1E25004●●**	0.52
	2	2	**LC1E25008●●**	0.52
45	4	-	**LC1E32004●●**	0.52
	2	2	**LC1E32008●●**	0.52
60	4	-	**LC1E38004●●**	0.52
	2	2	**LC1E38008●●**	0.52
60	4	-	**LC1E40004●●**	1.30
	2	2	**LC1E40008●●**	1.30
80	4	-	**LC1E65004●●**	1.30
	2	2	**LC1E65008●●**	1.30
100	4	-	**LC1E80004●●**	1.60
	2	2	**LC1E80008●●**	1.60
125	4	-	**LC1E95004●●**	1.60
	2	2	**LC1E95008●●**	1.60

Control voltage code										
	Volts	**24**	**48**	**110**	**220**	**230**	**240**	**380**	**400**	**415**
LC1E06-95	50/60 Hz	B7	E7	F7	M7	P7	U7	Q7	V7	N7

Seperate components


Auxiliary contact blocks, add-on modules and accessories, see pages A-20 to A-21.


Coil spare parts


For maintenance, each coil can be ordered separatly, please check with schneider electric.


(1) LC1E06 to E38: clip-on mounting on 35 mm ⊐ rail AM1 DP or screw fixing.
LC1E40 to E95: clip-on mounting on 35 mm ⊐ rail AM1DP or 75 mm ⊐ rail AM1 DL or screw fixing.


EasyPact TVS contactors
3-pole/4-pole Accessories for LC1E contactor


LAEM1


LAEP3


LAEP4

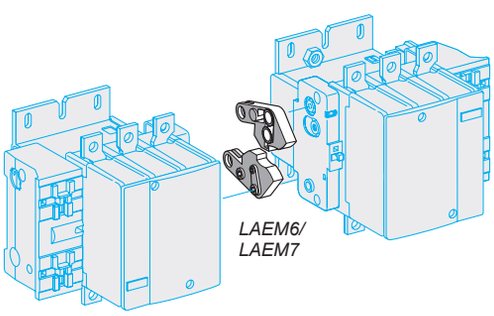
LAEM6/
LAEM7


LAERC●

LC1E●●

3-pole accessories for LC1E contactor

Accessories for motor reverse assembly

Contactors with screw clamp terminals

Using 2 identical contactors	Set of power connections		Mechanical interlock	
	Cat. no.	Weight kg	Cat. no.	Weight kg
Mechanical interlock				
LC1E06...E12	**LAEP1**	0.020	**LAEM1**	0.030
LC1E18/E25	**LAEP12**	0.026	**LAEM1**	0.030
LC1E32/E38	**LAEP2**	0.040	**LAEM1**	0.030
LC1E40...E65	**LAEP3**	0.230	**LAEM1**	0.030
LC1E80/E95	**LAEP4**	0.465	**LAEM4**	0.095
LC1E120/E160	– (*DIY*) (1)		**LAEM5**	0.300
LC1E200/E250	– (*DIY*) (1)		**LAEM6**	0.110
LC1E300	– (*DIY*) (1)		**LAEM7**	0.250
LC1E400	– (*DIY*) (1)		**LAEM7**	0.250
LC1E500	– (*DIY*) (1)		**LAEM7**	0.250
LC1E630	– (*DIY*) (1)		**LAEM8**	0.270

(1) DIY : Do It Yourself.

4-pole accessories for LC1E contactor

Accessories for motor reverse assembly

Contactors with screw clamp terminals

Using 2 identical contactors	Mechanical interlock	
	Cat. no.	Weight kg
Mechanical interlock		
LC1E06...E12	**LAEM1**	0.030
LC1E18/E25	**LAEM1**	0.030
LC1E32/E38	**LAEM1**	0.030
LC1E40...E65	**LAEM4**	0.030
LC1E80/E95	**LAEM4**	0.095

RC surge suppressor

■ Effective protection for circuits highly sensitive to "high frequency" interference and transcient generated when the contactor coil is switched off. For use only in cases where the voltage is virtually sinusoidal, i.e. less than 5 % total harmonic distortion.
■ Voltage limited to 3 Uc max. and oscillating frequency limited to 400 Hz max.
■ Slight increase in drop-out time (1.2 to 2 times the normal time).

Mounting	For use with contactor		Cat. no.	Weight
	Rating	Type		
		V~		kg
Screw mounting	LC1E06...E95	24...48	**LAERCE**	0.025
		50...127	**LAERCG**	0.025
		110...240	**LAERCU**	0.025
		380...415	**LAERCN**	0.025

EasyPact TVS contactors
Accessories for LC1E contactor



LAEN22



LAETSD

Instantaneous auxiliary contact blocks for connection by screw lamps terminals

For use in normal operating environment

Clip-on mounting	Number of contacts per block	Cat. no.	Weight kg
Front	1 NO / 1 NC	**LAEN11**	0.035
	2 NO	**LAEN20**	0.035
	2 NC	**LAEN02**	0.035
	2 NO / 2 NC	**LAEN22**	0.060

Time delay auxiliary contact blocks for connection by screw clamp terminals 8 A - 690 V

Clip-on mounting	Number of contacts per block	Time delay Type	Setting range	Cat. no. (1)	Weight kg
Front	1 NO / 1 NC	On-delay	**1...30 s**	**LAETSD**	0.060

(1) For use only LC1E25 to LC1E630.

Instantaneous and time delay contact characteristics

Contact block type				LAEN11, 20, 02, 22			LAETSD		
Number of contacts				2 or 4			2		
Rated operational voltage (Ue)	Up to		**V**	690					
Rated insulation voltage (Ui)	Conforming to IEC 60947-5-1			690					
Conventional thermal current (Ith)	For ambient temperature θ ≤ 60 °C		**A**	10					
Minimum switching capacity		U min	**V**	17					
		I min	**mA**	5					
Short-circuit protection	Conforming to IEC 60947-5-1		**A**	10					
Rated making capacity	Conforming to IEC 60947-5-1		**Irms**	∿ 140					
Short-time rating	Permissible for	1 s	**A**	100					
		500 ms		120					
		100 ms		140					
Insulation resistance			**mΩ**	> 10					
Non-overlap time	Guaranteed between NC and NO contacts		**ms**	1.5 (on energisation and on de-energisation)					
Overlap time	Guaranteed between LAE N22 N/C and N/O contacts		**ms**	–					
Time delay	Ambient air temperature for operation		**°C**	–			-20...+70		
	Repeat accuracy			–			±2 %		
	Drift up to 0.5 million operating cycles			–			+15 %		
	Drift depending on ambient air temperature			–			0.25 % per °C		
Mechanical durability			**In millions of operating cycles**	10			4		
Rated operational power of contacts (Conforming to IEC 60947-5-1)	a.c. supply categories AC14/15		**V**	24	48	115	230	400	440
	1 million operating cycles		**VA**	60	120	280	560	960	1050
	3 million operating cycles			16	32	80	160	280	300
	10 million operating cycles			4	8	20	4	70	80

EasyPact TVS contactors
Accessories for LC1E

Environment				
Contact block type			**LAEN11, 20, 02, 22**	**LAETSD**
Conforming to standard			IEC 60947-5-1	
Product certifications			EAC	
Protective treatment	Conforming to IEC 60068		"TH"	
Degree of protection	Conforming to IEC 60529		IP2X	
Ambiant air temperature	Storage	**°C**	-60...+80	
	Operation		-5...+55	
	Permissible for operation at Uc		-20...+70	
Maximum operating altitude	Without derating	**m**	3000	
Connection by cable	Philips N° 2 and Ø 6 mm. Flexible or solid cable with or without cable end	**mm²**	Min: 1 x 1 Max: 2 x 2.5	
Tightening torque		**N.m**	1.2	

3-pole Accessories compatibility


Contactor	Built in contacts	LAEN●●	LAETSD	LAERC●	LAEM	LAEP●
LC1E06 LC1E09 LC1E12 LC1E18	1 NO or 1NC	1	-	1	1	1
LC1E25 LC1E32 LC1E38	1 NO or 1NC	1 or 1				
LC1E40 LC1E65 LC1E80 LC1E95	1 NO + 1NC	1 or 1				
LC1E120 LC1E160	1 NO + 1NC	1 or 1		-		DIY (1)
LC1E200 LC1E250 LC1E300	-	2 or 0 1 or 1		-		DIY (1)
LC1E400 LC1E500 LC1E630	-	2 or 0 1 or 1		-		DIY (1)

(1) Do It Yourself.

4-pole Accessories compatibility

Contactor	LAEN●●	LAETSD	LAERC●
LC1E06 LC1E09 LC1E12 LC1E18	1 or 1		1
LC1E25 LC1E32 LC1E38	1 or 1		1
LC1E40 LC1E50 LC1E65 LC1E80 LC1E95	1 or 1		1

EasyPact TVS 3-poles contactors
Coil replacement for EasyPact TVS, LC1E06 to E38



LAEX12●●


For 3-pole contactors LC1E06...E25

Specifications

Average consumption at 20 °C:
- inrush (cos φ = 0.75) 50 Hz: 70 VA; 60 Hz: 70 VA
- sealed (cos φ = 0.3) 50 Hz: 7 VA; 60 Hz: 7.5 VA

Operating range (θ ≤ 55 °C): 0.85...1.1 Uc.

Control circuit voltage Uc	Average resistance at 20 °C ±10 %	Inductance of closed circuit	Cat. no. (1)	Average resistance at 20 °C ±10 %	Inductance of closed circuit	Cat. no. (1)	Average resistance at 20 °C ±10 %	Inductance of closed circuit	Cat. no. (1)	Weight
V	Ω	H	50 Hz	Ω	H	60 Hz	Ω	H	50/60 Hz	kg
24	5.37	0.21	**LAEX12B5**	5.37	0.18	**LAEX12B6**	5.2	0.17	**LAEX12B7**	0.067
48	21.7	0.84	**LAEX12E5**	-	-	**-**	21.0	0.68	**LAEX12E7**	0.067
110	124	4.41	**LAEX12F5**	124	3.68	**LAEX12F6**	117.1	3.80	**LAEX12F7**	0.067
220	515	17.6	**LAEX12M5**	516	14.7	**LAEX12M6**	507.5	16.48	**LAEX12M7**	0.067
240	562	21.0	**LAEX12U5**	-	-	**-**	-	-	**-**	0.067
380	1550	52.6	**LAEX12Q5**	1550	43.8	**LAEX12Q6**	1397.4	45.38	**LAEX12Q7**	0.067
415	1690	62.8	**LAEX12N5**	-	-	**-**	-	-	**-**	0.067
440	1990	70.6	**LAEX12R5**	1990	58.9	**LAEX12R6**	-	-	**-**	0.067



LAEX2●●

For 3-pole contactors LC1E32/E38

Specifications

Average consumption at 20 °C:
- inrush (cos φ = 0.75) 50 Hz: 70 VA; 60 Hz: 70 VA
- sealed (cos φ = 0.3) 50 Hz: 7 VA; 60 Hz: 7.5 VA

Operating range (θ ≤ 55 °C): 0.85...1.1 Uc.

Control circuit voltage Uc	Average resistance at 20 °C ±10 %	Inductance of closed circuit	Cat. no. (1)	Average resistance at 20 °C ±10 %	Inductance of closed circuit	Cat. no. (1)	Average resistance at 20 °C ±10 %	Inductance of closed circuit	Cat. no. (1)	Weight
V	Ω	H	50 Hz	Ω	H	60 Hz	Ω	H	50/60 Hz	kg
24	5.37	0.21	**LAEX2B5**	5.37	0.18	**LAEX2B6**	5.2	0.18	**LAEX2B7**	0.073
48	21.7	0.84	**LAEX2E5**	-	-	**-**	21.1	0.73	**LAEX2E7**	0.073
110	124	4.41	**LAEX2F5**	124	3.68	**LAEX2F6**	117.0	4.07	**LAEX2F7**	0.073
220	515	17.6	**LAEX2M5**	516	14.7	**LAEX2M6**	509.7	17.72	**LAEX2M7**	0.073
240	562	21.0	**LAEX2U5**	-	-	**-**	-	-	**-**	0.073
380	1550	52.6	**LAEX2Q5**	1550	43.8	**LAEX2Q6**	1536.1	53.40	**LAEX2Q7**	0.073
415	1690	62.8	**LAEX2N5**	-	-	**-**	-	-	**-**	0.073
440	1990	70.6	**LAEX2R5**	1990	58.9	**LAEX2R6**	-	-	**-**	0.073

(1) The last two digits in the reference represent the voltage code.

EasyPact TVS 3-poles contactors
Coil replacement for EasyPact TVS, LC1E40 to E95

For 3-pole contactors LC1E40...E65


Specifications

Average consumption at 20 °C:
- inrush (cos φ = 0.75): 50 Hz: 160 VA; 60 Hz: 140 VA
- sealed (cos φ = 0.3) 50 Hz: 15 VA; 60 Hz: 13 VA

Operating range (θ ≤ 60 °C): 0.85...1.1 Uc

Control circuit voltage Uc	Average resistance at 20 °C ±10 %	Inductance of closed circuit	Cat. no. (1)	Average resistance at 20 °C ±10 %	Inductance of closed circuit	Cat. no. (1)	Average resistance at 20 °C ±10 %	Inductance of closed circuit	Cat. no. (1)	Weight
V	Ω	H	50 Hz	Ω	H	60 Hz	Ω	H	50/60 Hz	kg
24	1.98	0.12	**LAEX3B5**	1.98	0.10	**LAEX3B6**	1.9	0.11	**LAEX3B7**	0.110
48	7.97	0.48	**LAEX3E5**	-	-	**-**	7.7	0.43	**LAEX3E7**	0.110
110	42.3	2.51	**LAEX3F5**	42.3	2.09	**LAEX3F6**	34.4	1.93	**LAEX3F7**	0.110
220	182	10.0	**LAEX3M5**	182	8.36	**LAEX3M6**	153.9	8.64	**LAEX3M7**	0.110
240	202	12.0	**LAEX3U5**	-	-	**-**	-	-	**-**	0.110
380	512	30.3	**LAEX3Q5**	512	25.3	**LAEX3Q6**	425.8	23.89	**LAEX3Q7**	0.110
415	635	35.8	**LAEX3N5**	-	-	**-**	-	-	**-**	0.110
440	682	40.1	**LAEX3R5**	682	33.4	**LAEX3R6**	-	-	**-**	0.110

For 3-pole contactors LC1E80/E95



LAEX4●●


Specifications

Average consumption at 20 °C:
- inrush (cos φ = 0.75) 50 Hz: 200 VA; 60 Hz: 220 VA
- sealed (cos φ = 0.3) 50 Hz: 20 VA; 60 Hz: 22 VA

Operating range (θ ≤ 55 °C): 0.85...1.1 Uc.

Control circuit voltage Uc	Average resistance at 20 °C ±10 %	Inductance of closed circuit	Cat. no. (1)	Average resistance at 20 °C ±10 %	Inductance of closed circuit	Cat. no. (1)	Average resistance at 20 °C ±10 %	Inductance of closed circuit	Cat. no. (1)	Weight
V	Ω	H	50 Hz	Ω	H	60 Hz	Ω	H	50/60 Hz	kg
24	1.4	0.09	**LAEX4B5**	1.05	0.04	**LAEX4B6**	1.2	0.09	**LAEX4B7**	0.145
48	5.5	0.35	**LAEX4E5**	-	-	**-**	4.3	0.36	**LAEX4E7**	0.145
110	31.0	1.90	**LAEX4F5**	22.0	0.90	**LAEX4F6**	24.0	1.92	**LAEX4F7**	0.145
220	127	7.50	**LAEX4M5**	98	3.80	**LAEX4M6**	95.0	7.29	**LAEX4M7**	0.145
240	152	5.4	**LAEX4U5**	-	-	**-**	-	-	**-**	0.145
380	381	14.11	**LAEX4Q5**	300	12.17	**LAEX4Q6**	298.6	23.47	**LAEX4Q7**	0.145
415	463	16.6	**LAEX4N5**	-	-	**-**	-	-	**-**	0.145
440	513	18.4	**LAEX4R5**	392	14.3	**LAEX4R6**	-	-	**-**	0.145

EasyPact TVS 3-poles contactors
Coil replacement for EasyPact TVS, LC1E120 to E160

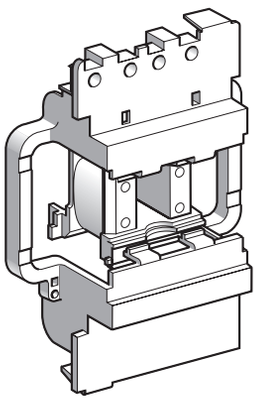

LAEX5●●

For 3-pole contactors LC1E120/E160

Specifications


Average consumption at 20 °C:
- inrush (cos φ = 0.8) 50 Hz: 300 VA
- sealed (cos φ = 0.8) 50 Hz: 22 VA

Operating range (θ ≤ 55 °C): 0.85...1.1 Uc.

Control circuit voltage Uc	Average resistance at 20 °C ±10 %	Inductance of closed circuit	Cat. no. (1)	Average resistance at 20 °C ±10 %	Inductance of closed circuit	Cat. no. (1)	Weight
V	Ω	H	50 Hz	Ω	H	60 Hz	kg
24	1.24	0.09	**LAEX5B5**	0.87	0.07	**LAEX5B6**	0.210
48	4.51	0.36	**LAEX5E5**	-	-	**-**	0.210
110	26.5	2.00	**LAEX5F5**	20.0	1.45	**LAEX5F6**	0.210
220	105	7.65	**LAEX5M5**	79.6	5.69	**LAEX5M6**	0.210
240	125	8.89	**LAEX5U5**	-	-	**-**	0.210
380	339	22.3	**LAEX5Q5**	243	17.0	**LAEX5Q6**	0.210
415	368	27.7	**LAEX5N5**	-	-	**-**	0.210
440	442	30.3	**LAEX5R5**	339	22.3	**LAEX5R6**	0.210

(1) The last two digits in the reference represent the voltage code.

EasyPact TVS 3-poles contactors
Coil replacement for EasyPact TVS, LC1E200 to E300



LAEX6●●


For 3-pole contactors LC1E200...E250

Specifications

Average consumption at 20 °C:
- inrush (cos φ = 0.9) 50 Hz: 805 VA; 60 Hz: 970 VA
- sealed (cos φ = 0.3) 50 Hz: 55 VA; 60 Hz: 66 VA

Heat dissipation: 18...24 W.
Operating time à Uc: closing = 20...35 ms, opening = 7...15 ms.

Control circuit voltage Uc	Average resistance at 20 °C ±10 %	Inductance of closed circuit	Cat. no. (1)	Average resistance at 20 °C ±10 %	Inductance of closed circuit	Cat. no. (1)	Weight
V	Ω	H	50 Hz	Ω	H	60 Hz	kg
24	0.18	0.03	**LAEX6B5**	0.13	0.02	**LAEX6B6**	0.510
48	0.71	0.12	**LAEX6E5**	-	-	**-**	0.510
110	4.2	0.65	**LAEX6F5**	2.7	0.44	**LAEX6F6**	0.510
220	17	2.59	**LAEX6M5**	11.1	1.80	**LAEX6M6**	0.510
240	20	3.09	**LAEX6U5**	-	-	**-**	0.510
380	51.3	7.8	**LAEX6Q5**	34	5.3	**LAEX6Q6**	0.510
415	62.3	9.1	**LAEX6N5**	-	-	**-**	0.510
440	62.3	9.1	**LAEX6R5**	43.5	6.9	**LAEX6R6**	0.510



LAEX7●●

For 3-pole contactors LC1E300

Specifications

Average consumption at 20 °C:
- inrush (cos φ = 0.9) 50 Hz or 60 Hz: 650 VA
- sealed (cos φ = 0.3) 50 Hz or 60 Hz: 10 VA.


Heat dissipation: 8 W.
Operating time à Uc: closing = 40...65 ms, opening = 100...170 ms.
Operate on networks with harmonic numbers ≤ 7.
Operating cycles/hour (θ ≤ 55 °C): ≤ 2400

Control circuit voltage Uc	Average resistance at 20 °C ±10 %	Inductance of closed circuit	Cat. no. (1)	Average resistance at 20 °C ±10 %	Inductance of closed circuit	Cat. no. (1)	Weight
V	Ω	H	50 Hz	Ω	H	60 Hz	kg
24	20	(2)	**LAEX7B5**	20	(2)	**LAEX7B6**	0.770
48	67	(2)	**LAEX7E5**	-	-	**-**	0.770
110	440	(2)	**LAEX7F5**	440	(2)	**LAEX7F6**	0.770
220	1578	(2)	**LAEX7M5**	1578	(2)	**LAEX7M6**	0.770
240	1968	(2)	**LAEX7U5**	-	-	**-**	0.770
380	4631	(2)	**LAEX7Q5**	4631	(2)	**LAEX7Q6**	0.770
415	4631	(2)	**LAEX7N5**	-	-	**-**	0.770
440	6731	(2)	**LAEX7R5**	6731	(2)	**LAEX7R6**	0.770

(1) The last two digits in the reference represent the voltage code.
(2) Please consult your Regional Sales Office.


EasyPact TVS 3-pole contactors
LC1E06 to E95

LC1E06...E25

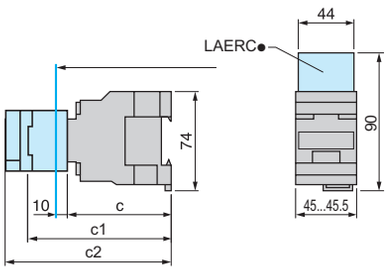


LC1	E06...E18	E25
c	80	85
c1 with LAEN	113	118
c2 with LAETSD	-	136

LC1E32/38

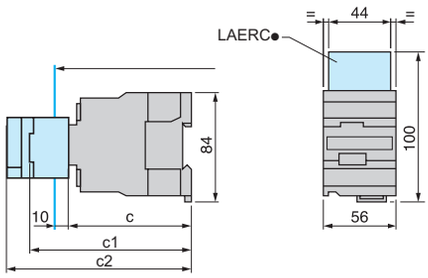


LC1	E32/38
c	86
c1 with LAEN	120
c2 with LAETSD	138

LC1E06...E25

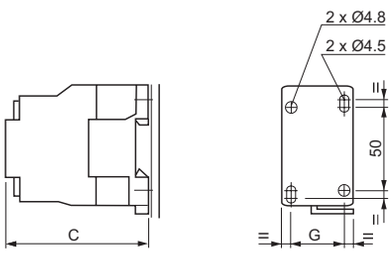


LC1	E06	E09	E12	E18	E25
c	80	80	80	80	85
G	35	35	35	35	35

LC1E32/38

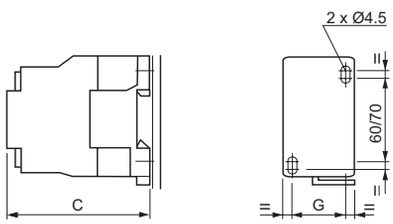


LC1	E32/38
c	86
G	40

LC1E40...E65

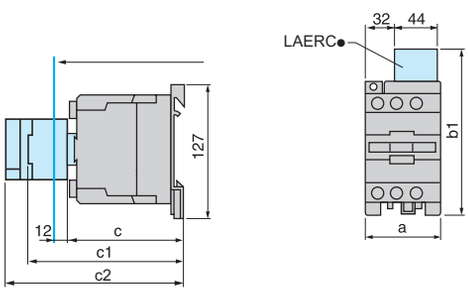


LC1		E40...E65
a		75
b1	with LAERC●	135
c		115
c1	with LAEN●	147
c2	with LAETSD	165

LC1E80/95

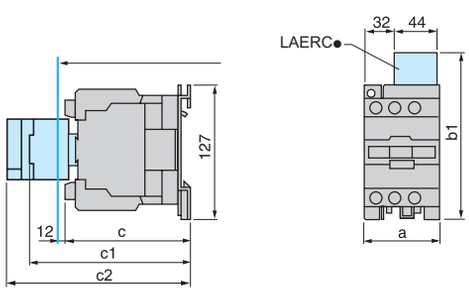


LC1		E80/95
a		85
b1	with LAERC●	135
c		124
c1	with LAEN●	153
c2	with LAETSD	171

LC1E40...E65

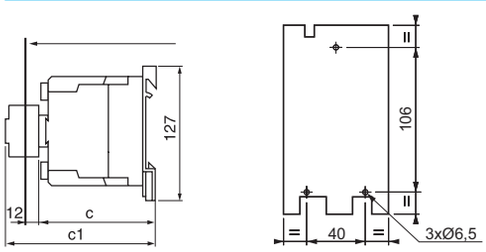

LC1	E40...E65
c	115


LC1E80/95

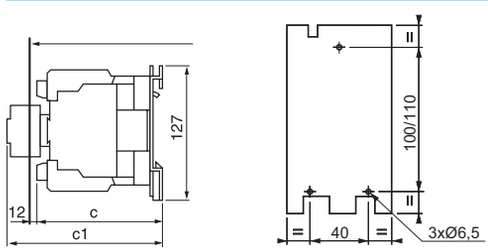

LC1	E80/95
c	124


EasyPact TVS 3-pole contactors
LC1E06 to E95

2 x LC1E06...E65 with LAEM1

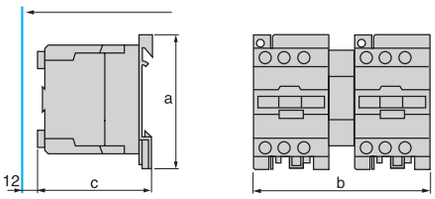

LC1	E06...25	E32...38	E40...65
a	74	84	127
b	104	126	164
c	80	86	114


2 x LC1E80/95 with LAEM4

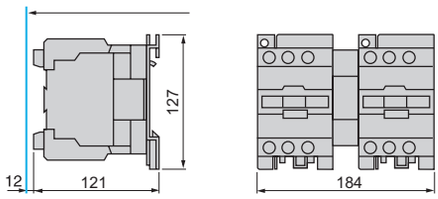

EasyPact TVS 3-pole contactors
LC1E120 and 160 A


LC1E120/160

On panel with accessories

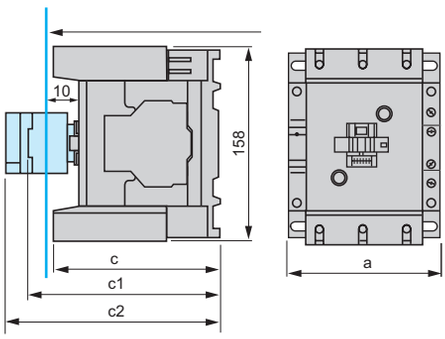


a		120
c	Without add-on blocks	132
c1	With LAEN	150
c2	With LAETSD	168

On 2 mounting rails DZ5 MB on 120 mm centres

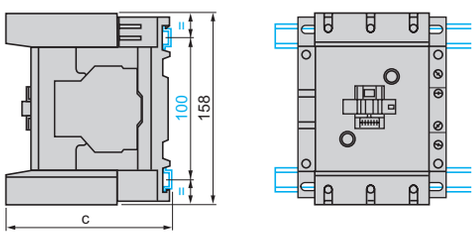


c	(AM1 DP200 or DR200)	134.5
c	(AM1 DE200 or ED●●●)	150

On Panel

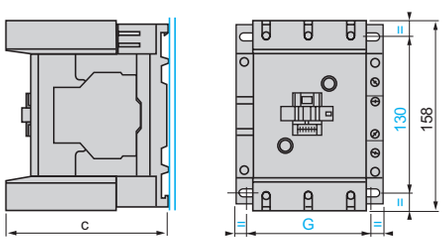

		LC1E120	LC1E160
c	(AM1 DP200 or DR200)	132	132
G		91/110	96/110

2 x LC1E120 or LC160 with LAEM5

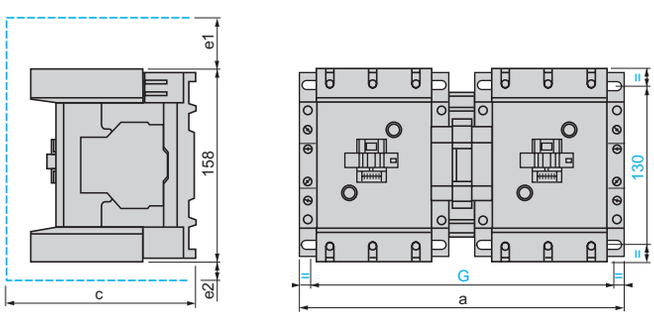


2 x LC1E120 or 160	a	c	e1	e2	G
For 120 and 160	266	148	56	18	242/256

c, e1 and e2: including cabing

EasyPact TVS 3-pole contactors
LC1E200, E250 and E300 A

LC1E200 - LC1E250 - LC1E300

On panel

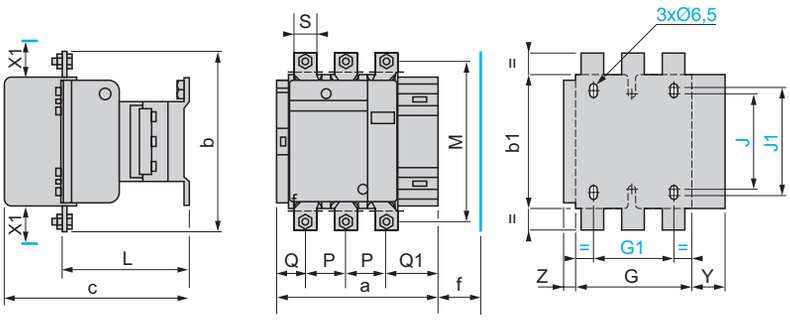


***X1** (mm) = minimum electrical clearence according to operating voltage and breaking capacity.*

	220...500 V	600...690 V
LC1E200	10	15
LC1E250, 300	10	15

	a	b	b1	c	f	G	G1	J	J1	L	M	P	Q	Q1	S	Y	Z
LC1E200	168.5	174	137	181	130	111	80	106	120	113.5	154	40	29	59.5	20	44	13.5
LC1E250	168.5	197	137	181	130	111	80	106	120	113.5	172	48	21	51.5	25	44	13.5
LC1E300	213	206	145	219	147	154.5	96	106	120	145	181	48	43	74	25	38	20.5

f = minimum distance required for coil removal.

2 x LC1E200 or LC1E250 with LAEM6 - 2 x LC1E300 with LAEM7

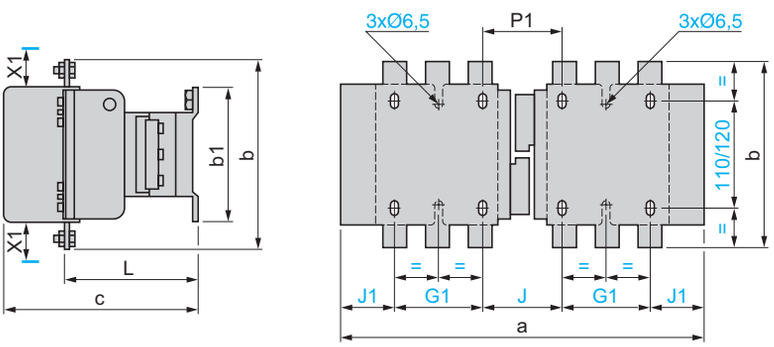

***X1** (mm) = minimum electrical clearence according to operating voltage and breaking capacity.*


	220...500 V	600...690 V
LC1E200	10	15
LC1E250, 300	10	15

	a	b	b1	c	G1	J	J1	L	P1
2 x LC1E200	357	174	137	181	80	78	59.5	113.5	78
2 x LC1E250	357	197	137	181	80	78	59.5	113.5	62
2 x LC1E300	447	206	145	219	96	124	65.5	145	107

EasyPact TVS 3-pole contactors
LC1E400, E500 and E630 A

LC1E400 - LC1E500

On panel

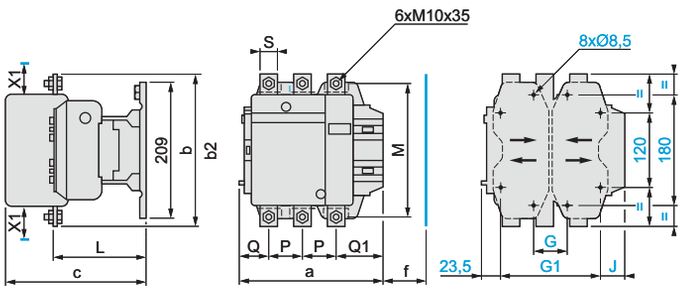


X1 *(mm) minimum electrical clearence according to operating voltage and breaking capacity.*

	220...500 V	600...690 V
LC1E400	15	20
LC1E500	15	20

	a	b	b2	c	f	G*	Gmin.	Gmax.	G1*	G1min.	G1max.	J	L	M	P	Q	Q1	S
LC1E400	213	206	375	219	146	80	66	102	170	156	192	19.5	145	181	48	43	74	25
LC1E500	233	238	400	232	150	80	66	120	170	156	210	39.5	146	208	55	46	77	30

f=minimum distance required for coil removal

LC1E630

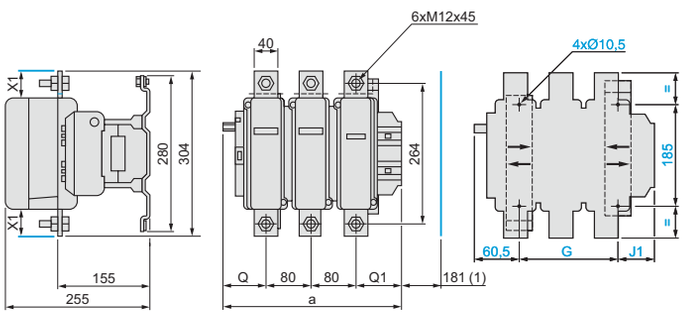

X1 *(mm) = minimum electrical clearence according to operation voltage and breaking capacity.*

	220...500 V	600...690 V
LC1E630	20	30

(1) *Minimum distance required for coil removal.*


	a	G*	G min	Gmax.	J1	Q	Q1
LC1E630	309	180	100	195	68.5	60	89

2 x LC1E400,LC1E500,LC1E630

X1 *(mm) = minimum electrical clearence according to operating voltage and breaking capacity.*

	220...500 V	600...690 V
LC1E400,500	15	20
LC1E630	20	30


(1) *Except LC1 E630 : 4 x Ø 10.5.*
(2) *Except LC1 E630 : 180mm.*

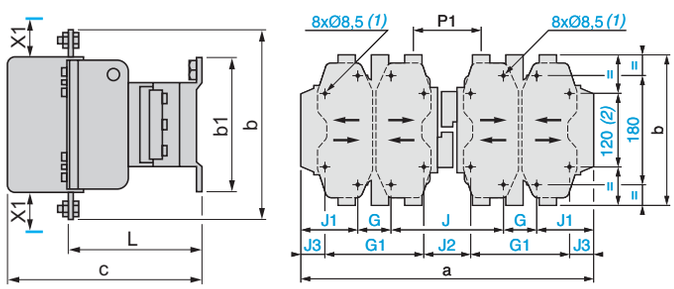

	a	b	b1	c	G	G1	J	J1	J2	J3	L	P1
2 x LC1E400	446	206	209	219	80	170	157	64.5	67	19.5	145	107
3 x LC1E500	485	238	209	232	80	170	156	84.5	66	39.5	146	112
4 x LC1E630	636	304	280	255	180	-	139	68.5	-	-	155	137


EasyPact TVS 4-pole contactors

LC1E06...E18

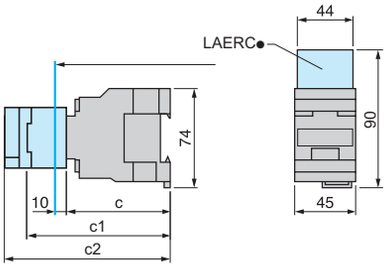


LC1	E06/E18
c	80
c1 with LAEN	113
c2 with LAETSD	135

LC1E25...E38

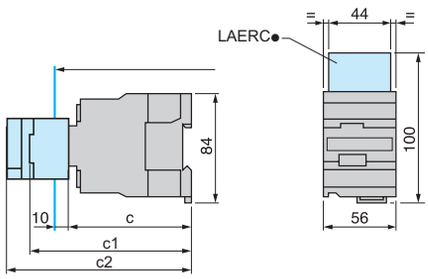


LC1	E25/38
c	93
c1 with LAEN	125
c2 with LAETSD	147

LC1E06...E18

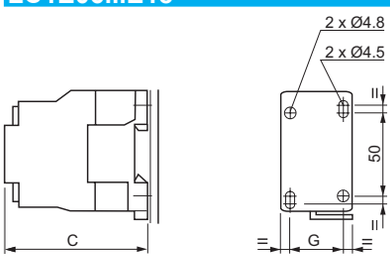


LC1	E06	E09	E12	E18
c	80	80	80	80
G	35	35	35	35

LC1E25...E38

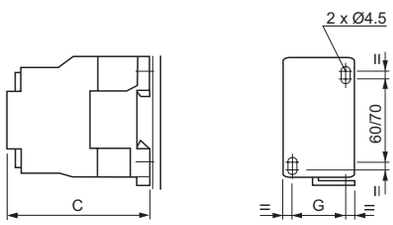


LC1	E25/38
c	93
G	40

LC1E40/65

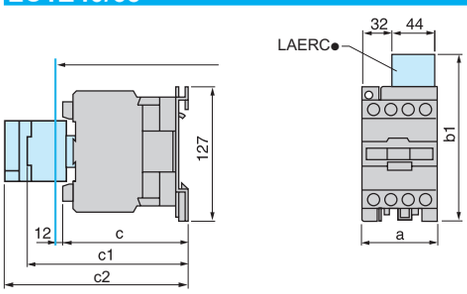


LC1		E40...E65
a		85
b1	with LAERC●	135
c		110/125
c1	with LAEN●	143
c2	with LAETSD	165

LC1E80/95

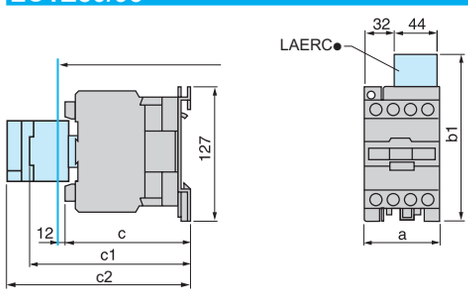


LC1		E80/95
a		95
b1	with LAERC●	135
c		120/135
c1	with LAEN●	160
c2	with LAETSD	172

LC1E40/65

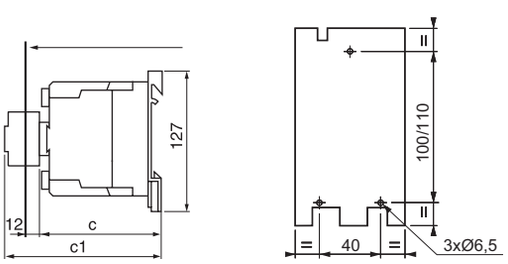

LC1	E40/E65
c	114

LC1E80/95

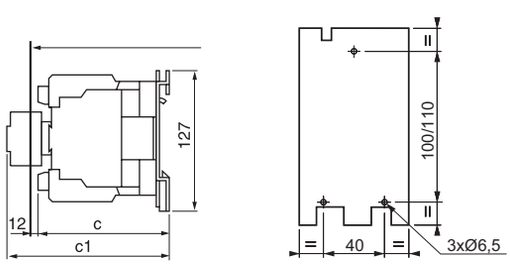


LC1	E80/95
c	121


EasyPact TVS contactors
LC1E06...630 A

Contactors (3-pole)


LC1E06...38

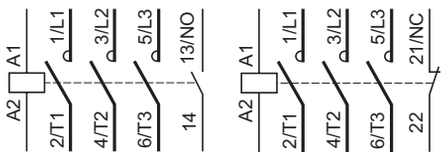


LC1E40...95




LC1E120/160



LC1E200, 250, 300




LC1E 400,500,630




Contactors (4-pole)


LC1E06...95004



LC1E06...38008



LC1E40...95008




EasyPact TVS contactors
LC1E06...630 A


Reversing contactors

2 x LC1E06...38

Horizontaly mounted

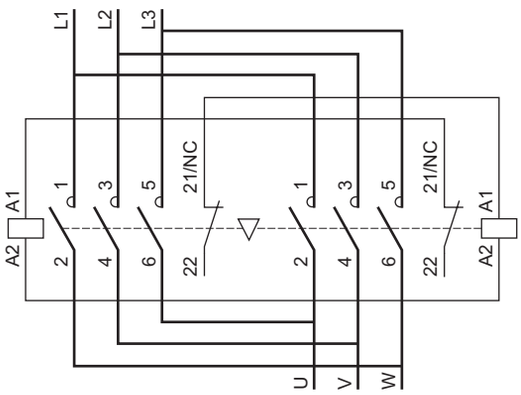


2 x LC1E40...95

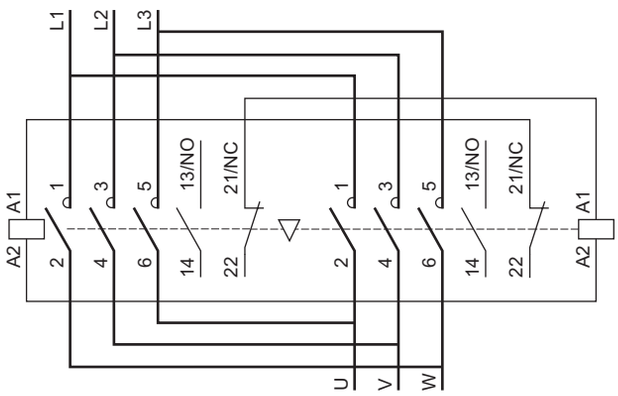


2 x LC1E120, 160

Horizontaly mounted

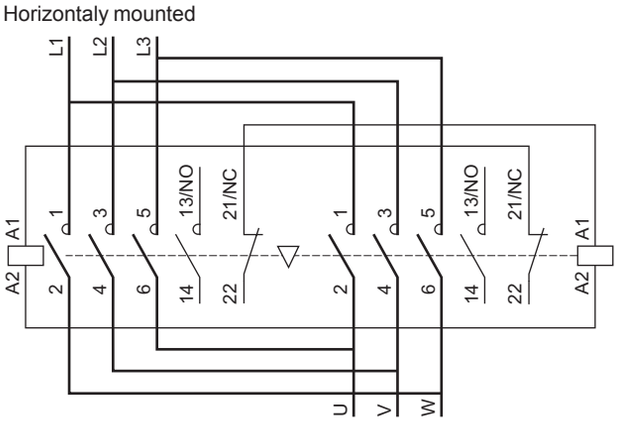


2 x LC1E200, 250, 300

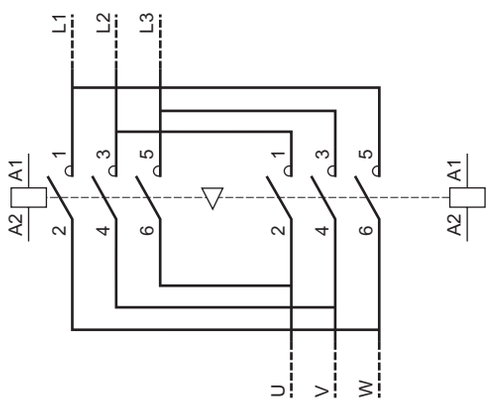


Front mounting add-on contact blocks


1NO + 1NC (LAEN11)




2NO (LAEN20)



2NC (LAEN02)



2NO +2NC (LAEN22)




Time delay auxiliary contacts

On delay 1NO + 1NC (LAETSD)



Mechanical interlock

LAEM●



EasyPact TVS thermal



TOR Com. Ref	Possible Imax Calibration	Compatible with Contactor (size 1 & 2) Com. Ref.						
		LC1E06	LC1E09	LC1E12	LC1E18	LC1E25	LC1E32	LC1E38
LRE01	0.10…0.16 A	■	■	■	■	■	■	■
LRE02	0.16…0.25 A	■	■	■	■	■	■	■
LRE03	0.25…0.40 A	■	■	■	■	■	■	■
LRE04	0.40…0.63 A	■	■	■	■	■	■	■
LRE05	0.63…1 A	■	■	■	■	■	■	■
LRE06	1…1.6 A	■	■	■	■	■	■	■
LRE07	1.6…2.5 A	■	■	■	■	■	■	■
LRE08	2.5…4 A	■	■	■	■	■	■	■
LRE10	4…6 A	■	■	■	■	■	■	■
LRE12	5.5…8 A		■	■	■	■	■	■
LRE14	7…10 A		■	■	■	■	■	■
LRE16	9 …13 A			■	■	■	■	■
LRE21	12…18 A				■	■	■	■
LRE22	16…24 A					■	■	■
LRE32	23…32 A					■	■	■
LRE35	30…38 A							■


Common characteristics

> Class: 10 A.
> Operating voltage: max. 690 V AC.

overload relays



TOR Com. Ref	Possible Imax Calibration	Compatible with Contactor (size 3 & 4) Com. Ref.				
		LC1E40	LC1E50	LC1E65	LC1E80	LC1E95
LRE322	17…25 A	■	■	■	■	■
LRE353	23…32 A	■	■	■	■	■
LRE355	30…40 A	■	■	■	■	■
LRE357	37…50 A		■	■	■	■
LRE359	48…65 A			■	■	■
LRE361	55…70 A				■	■
LRE363	63…80 A				■	■
LRE365	80…104 A					■

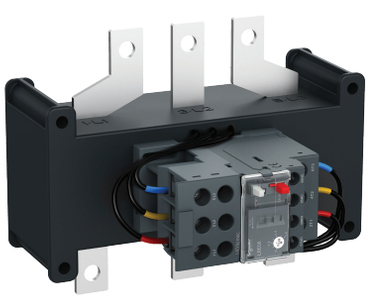

TOR Com. Ref	Possible Imax Calibration	Compatible with Contactor (size 5, 6, 7, 8 & 9) Com. Ref.							
		LC1E120	LC1E160	LC1E200	LC1E250	LC1E300	LC1E400	LC1E500	LC1E630
LRE480	51…81A	■	■	□	□	□	□	□	□
LRE481	62…99A	■	■	□	□	□	□	□	□
LRE482	84…135A	■	■	□	□	□	□	□	□
LRE483	124…198A		□	■	□	□	□	□	□
LRE484	146…234A			□	■	■	■	□	□
LRE485	174…279A			□	■	■	■	□	□
LRE486	208…333A				■	■	■	□	□
LRE487	259…414A					■	■	□	□
LRE488	321…513A						□	■	□
LRE489	394…630A							□	■


Note:

■ *means the relay can match with contactor both in electrical and mechanical.*

□ *means the relay can match with contactor only in electrical (can not directly mounting).*

EasyPact TVS thermal overload relays


Presentation




EasyPact TVS thermal overload relays are designed to protect a.c. circuits and motors against:
- overloads
- phase failure
- Long starting time
- prolonged stalled rotor condition.

The thermal relay controls permanently the current driven by the motor. When this current exceeds the setting it's auxiliary contacts will change state, causing the motor to stop.

Description

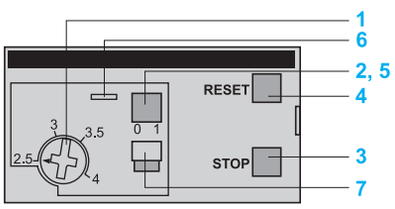

LRE●●, LRE48●

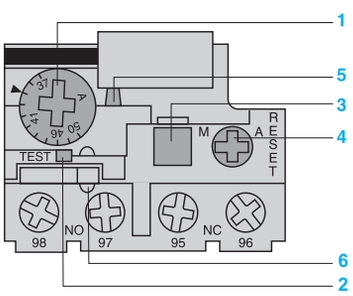

LRE3●●

1 Adjustment dial Ir.
2 Test button.
Operation of the Test button allows:
- checking of control circuit wiring,
- simulation of relay tripping (actuates both the N/O and N/C contacts).
3 Stop button. Actuates the N/C contact; does not affect the N/O contact.
4 Reset button.
5 Trip indicator.
6 Setting locked by sealing the cover.
7 Selector for manual or automatic reset.

LRE relays are supplied with the selector in the manual position, protected by a cover.
Deliberate action is required to move it to the automatic position.

EasyPact TVS thermal overload relays


Power circuit characteristics												
Relay type		**Ref.**	**LRE 01...21**	**LRE 22...35**	**LRE 322...365**	**LRE 480…482**	**LRE 483**	**LRE 484**	**LRE 485…487**	**LRE 488**	**LRE 489**
		Size	**1**		**2**	**3**				**4**	
Tripping class	Conforming to IEC 60947-4-1		10 A								
Rated insulation voltage	Conforming to IEC 60947-4-1	**V**	690								
Rated impulse withstand voltage (Uimp)		**kV**	6								
Frequency limits	Of the operating current	**Hz**	50...60								
Setting range	Depending on model	**A**	0.1...18	16...38	17...104	51...630					
Power circuit connections											
Connection by screw clamp terminals			**Minimum/maximum c.s.a.**								
	Flexible cable without cable end 1 conductor	**mm²**	1.5...6	2.5...10	4...35	-					
	Flexible cable with cable end 1 conductor		1...4	1.5...6	4...35	-					
	Solid cable without cable end 1 conductor		1...6	2.5...10	4...35	-					
	Tightening torque	**N.m**	1.7	2.5	9	-					
Connection by bars or lugs											
Pitch	Without spreaders	**mm**	-			34.8	40	48	48	55	80
Bars or cables with lugs	Cross section		-			3X18	3X20	3X25	4X25	5x30	6X40
Screws	Type		-			M8	M8	M10	M10	M10	M12
	Tightening torque	**N.m**	-			27.5	27.5	35	35	35	58
Auxiliary contact characteristics											
Conventional thermal current		**A**	5								
Max. sealed consumption of the operating coils of controlled contactors (Occasional operating cycles of contact 95-96)	a.c. supply	**V**	110	120	220	240	380	480	500	600	
		A	3.27	3	1.63	1.5	0.95	0.75	0.72	0.12	
Protection against short-circuits	By gG, maximum rating or by GB2	**A**	5								
Connection by screw clamp terminals			Minimum/maximum c.s.a.								
	Flexible cable without cable end 1 conductor	**mm²**	2 x 1...2.5								
	Flexible cable with cable end 1 conductor		2 x 1...2.5								
	Solid cable without cable end 1 conductor		2 x 1...2.5								
	Tightening torque	**N.m**	1.7								
Environment											
Conforming to standard			IEC 60947-4-1, IEC 60947-5-1								
Product certifications			EAC								
Degree of protection	Conforming to IEC 60529		IP2X			IP00					
Protective treatment	Conforming to IEC 60068		"TH"								
Ambiant air temperature	Storage	**°C**	-60...+80								
	Normal operation without derating (IEC 60947-4-1)		-20...+60								
	Minimum/maximum operating temperature (with derating) (1)		-20...+70								
Operating positions without derating	In relation to normal vertical mounting plane		Any position								
Flame resistance	Conforming to IEC 60068-2-1	**°C**	850								
Shock resistance	Permissive acceleration conforming to IEC 60068-2-7		6 gn - 11 ms								
Vibration resistance	Permissive acceleration conforming to IEC 60068-2-6		3 gn								
Dielectric strenght at 50 Hz	Conforming to IEC 60255-5	**kV**	6								
Surge withstand	Conforming to IEC 60801-5		6								
Operating characteristics											
Temperature compensation		**°C**	-20...+60								
Tripping threshold	Conforming to IEC 60947-4-1	**A**	1.14 ± 0.06 Ir								
Sensitivity to phase failure	Conforming to IEC 60947-4-1		Tripping current 130 % of Ir on two phase, the last one at 0								

(1) *Contact your regional sales.*

EasyPact TVS thermal overload relays

Tripping curves

Average operating time related to multiples of the setting current

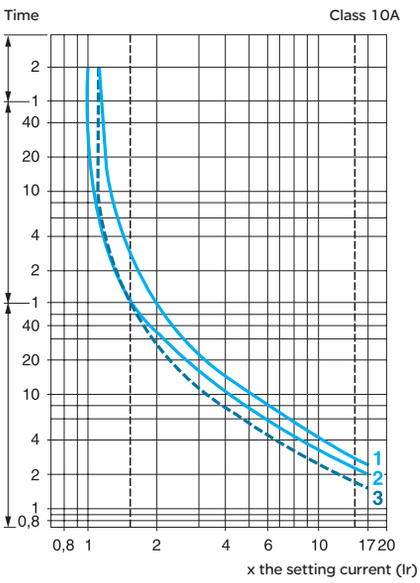

1 Balanced operation, 3-phase, without prior current flow (cold state).
2 2-phase operation, without prior current flow (cold state).
3 Balanced operation, 3-phase, after a long period at the set current (hot state).


EasyPact TVS thermal overload relays
3-pole thermal overload relays



LRE●●



LRE3●●



LRE48●

Differential thermal overload relays
for use with fuses or magnetic circuit-breakers GV2 L and GV3 L


- Compensated relays with manual or automatic reset,
- with relay trip indicator,
- for a.c.

Relay setting range (A)	Fuses to be used with selected relay		For use with contactor LC1	Reference	Weight kg
	aM (A)	gG (A)			
Class 10 A (1) for connection by screw clamp terminals					
0.10…0.16	0.25	2	E06…E38	**LRE01**	0.130
0.16…0.25	0.5	2	E06…E38	**LRE02**	0.130
0.25…0.40	1	2	E06…E38	**LRE03**	0.130
0.40…0.63	1	2	E06…E38	**LRE04**	0.130
0.63…1	2	4	E06…E38	**LRE05**	0.130
1…1.6	2	4	E06…E38	**LRE06**	0.130
1.6…2.5	4	6	E06…E38	**LRE07**	0.130
2.5…4	6	10	E06…E38	**LRE08**	0.130
4…6	8	16	E06…E38	**LRE10**	0.130
5.5…8	12	20	E09…E38	**LRE12**	0.130
7…10	12	20	E09…E38	**LRE14**	0.130
9…13	16	25	E12…E38	**LRE16**	0.130
12…18	20	35	E18…E38	**LRE21**	0.130
16…24	25	50	E25…E38	**LRE22**	0.130
23…32	40	63	E25…E38	**LRE32**	0.130
30…38	40	80	E38	**LRE35**	0.130
17...25	25	50	E40…E95	**LRE322**	0.470
23...32	40	63	E40…E95	**LRE353**	0.470
30...40	40	100	E40…E95	**LRE355**	0.470
37...50	63	100	E50…E95	**LRE357**	0.460
48...65	63	100	E65…E95	**LRE359**	0.460
55...70	80	125	E80…E95	**LRE361**	0.480
63...80	80	125	E80…E95	**LRE363**	0.480
80...104	80	160	E95	**LRE365**	0.520
Class 10 A (1) directly connected by connector					
51...81	100	125	E120...E160	**LRE480**	2.2
62...99	125	160	E120...E160	**LRE481**	2.2
84...135	160	200	E120...E160	**LRE482**	2.2
124...198	200	250	E200	**LRE483**	2.1
146...234	250	315	E250...E400	**LRE484**	2.2
174...279	315	315	E250...E400	**LRE485**	2.2
208...333	400	400	E250...E400	**LRE486**	2.2
259…414	400	500	E300...E400	**LRE487**	2.4
321…513	500	800	E500	**LRE488**	3.2
394…630	630	1000	E630	**LRE489**	3.9

(1) Standard IEC 60947-4-1 specifies a tripping time for 7.2 times the setting current I_R : class 10 A: between 2 and 10 seconds.


EasyPact TVS thermal overload relays
Direct connection to LRE contactors

LRE01...E35
Direct mounting under LC1E06...38 contactors with screw clamp connections

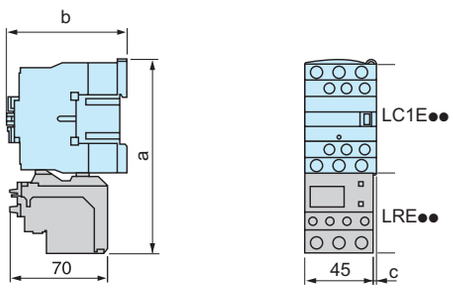

With contactor	LC1E06...E18	LC1E25	LC1E32/E38
a	128	137	137
b	84	92	92
c	0	0	11


LRE3●●
Direct mounting under LC1E06...38 contactors with screw clamp connections

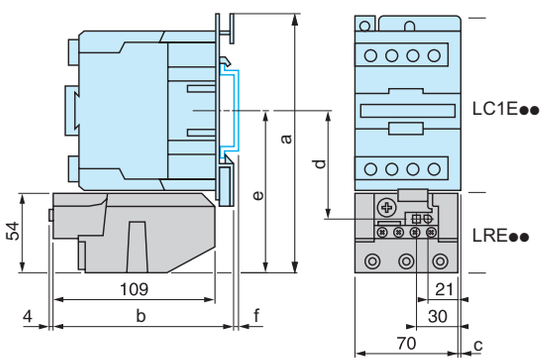

With contactor on DIN rail	AM1-DL201	AM1-DL200
f	7	17

With contactor	LC1E40	LC1E50	LC1E65	LC1E80	LC1E95
a	175	175	175	180	180
b	119	119	119	124	124
c	4.5	4.5	4.5	9.5	9.5
d	72.4	72.4	72.4	76.9	76.9
e	111	111	111	115.5	115.5

Electrical diagram all relays

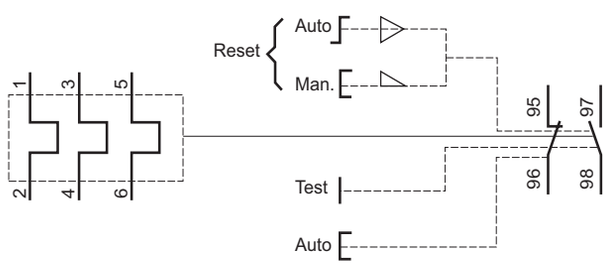



EasyPact TVS thermal overload relays
Connection to a terminal block

LRE01...E35 connected to LAEB1 terminal block


Independent mounting on 50 mm centres; or on rail AM1 DP200 or DE200

Independent mounting on 110 mm centres






Mounting on DIN rail AM1D●●●




Mounting customer back plate

LRE322...E365, connected to LAEB3 terminal block

Independent mounting on 50 mm centres; or on rail AM1 DP200 or DE200

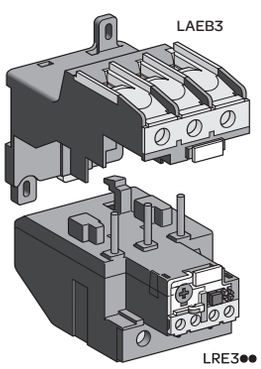

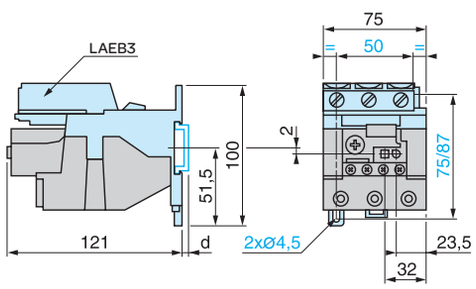


Mounting on DIN rail AM1D●●●


	AM1-DP200	AM1-DE200
d	2	9.5

EasyPact TVS thermal overload relays
Independant mounting and connection

LRE48●
Independent mounting on mounting plate

LRE48●: with direct mounting under contactors LC1E120...630 or separate mounting (without accessory).

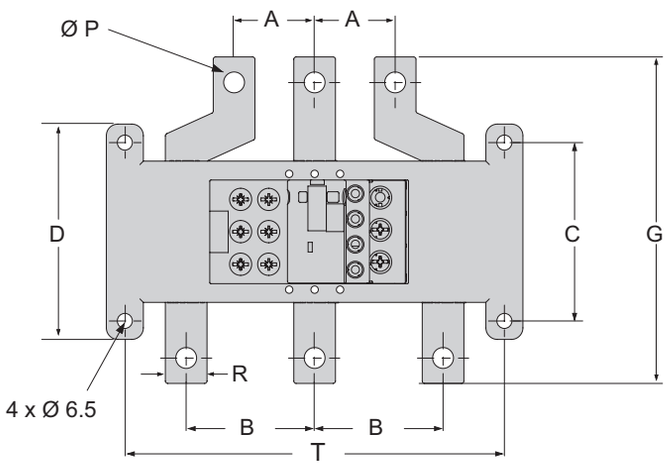

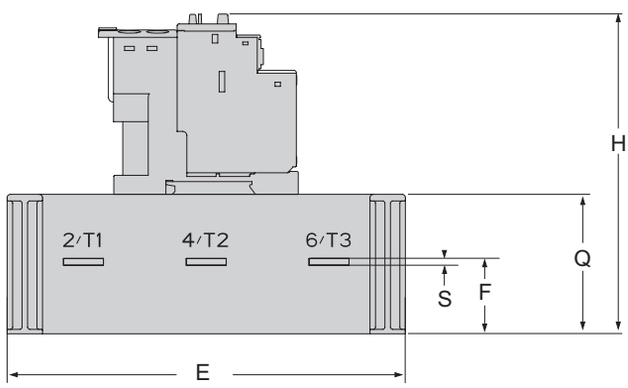

(mm)


Dimensions and mounting


Range (A)		A	B	C	D	E	F	G	H	P	Q	R	S	T
LRE480	51…81	34.8	55.5	77	93	180	32	141	134	9	63	18	3	164
LRE481	62...99													
LRE482	84...135													
LRE483	124...198	40						131		10		20		
LRE484	146...234	48						134		12		25		
LRE485	174...279						32.5					25	4	
LRE486	208...333													
LRE487	259...414													
LRE488	321...513	55	76			242	43	140	148	14	77	30	5	222
LRE489	394...630	80	80				43.5	150				40	6	

EasyPact TVS thermal overload relays
Independant mounting and connection

LRE48●
Independent mounting on mounting plate

LRE48●: with direct mounting.

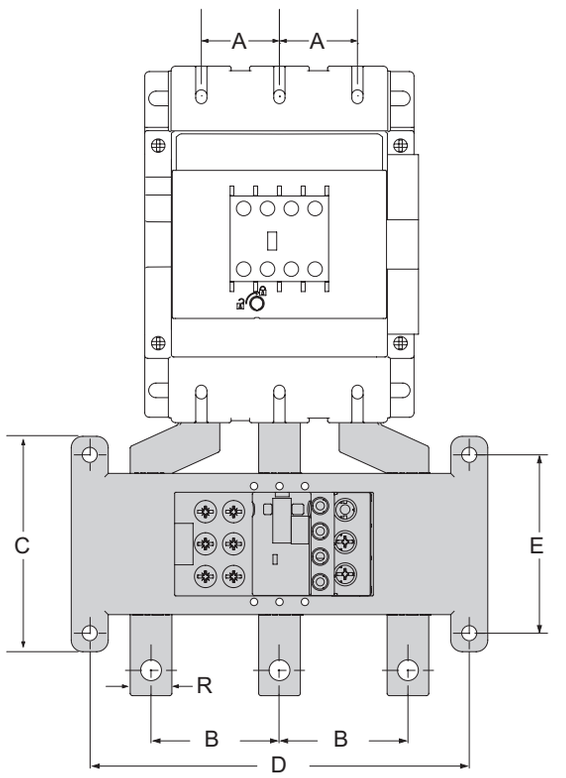

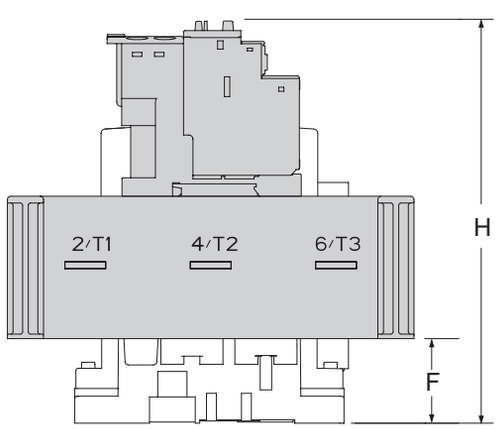


(mm)


Dimensions and mounting


Range (A)		A	B	C	D	E	F	H
LRE480	51…81	34.8	55.5	93	164	77	38	180
LRE481	62...99							
LRE482	84...135							
LRE483	124...198	40					82	223
LRE484	146...234	48					113	255
LRE485	174...279							
LRE486	208...333							
LRE487	259...414							
LRE488	321...513	55	76		222			264
LRE489	394...630	80	80				125	279


EasyPact TVS thermal overload relays
Independant mounting and connection

CDB500412












Accessories for LRE48X Thermal Overload Relay			
Relay mounting with Contactor directly			
Relay	Contactor	Mounting support	
		cat No.	weight (Kg)
LRE480	LC1E120...160	LAES1	0.32
LRE481	LC1E120...160	LAES1	0.32
LRE482	LC1E120...160	LAES1	0.32
LRE483	LC1E200	LAES2	0.45
LRE484	LC1E250...300	LAES2	0.45
LRE485	LC1E250...300	LAES2	0.45
LRE486	LC1E250...300	LAES2	0.45




Dimension	LAES1	LAES2	
A (mm)	34	70	
B (mm)	30	70	
C (mm)	34-42	75-90	107-122

EasyPact TVS control relays







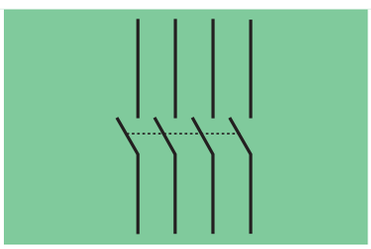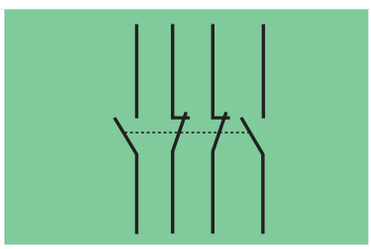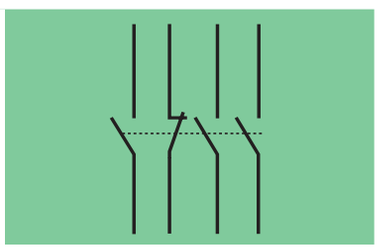Contact configuration			
Coil V AC/Hz	**50 Hz**	**50 Hz**	**50 Hz**
24	CAE40B5	CAE22B5	CAE31B5
48	CAE40E5	CAE22E5	CAE31E5
110	CAE40F5	CAE22F5	CAE31F5
220	CAE40M5	CAE22M5	CAE31M5
240	CAE40U5	CAE22U5	CAE31U5
380	CAE40Q5	CAE22Q5	CAE31Q5
415	CAE40N5	CAE22N5	CAE31N5
Coil V AC/Hz	**60 Hz**	**60 Hz**	**60 Hz**
110	CAE40F6	CAE22F6	CAE31F6
220	CAE40M6	CAE22M6	CAE31M6
440	CAE40R6	CAE22R6	CAE31R6

Control circuit characteristics

Type				CAE~
Rated control circuit voltage (Uc)			V	24...440
Control voltage limits	Operation	Coil type: 50 Hz		0.85...1.1 Uc
	Drop-out			0.3...0.6 Uc
Average consumption at 20 °C and at Uc	~ 50 Hz		VA	Sealed and closed: 70
				Maintain: 8
Operating time (rated control circuit voltage, ambient temperature 20 °C)	Between coil energisation and	opening of the N/C contact	ms	4...19
		closing of the N/O contact		12...22
	Between coil de-energisation and	opening of the N/O contact		4...12
		closing of the N/C contact		6...17
Momentary supply failure	Maximum power-off time without influencing sealed state			2
Maximum operating rate	Operating cycles per second			3
Mechanical durability In millions of operating cycles	Coil type:	50 Hz		10

Control connection (coil)


Connecting to screw clamp terminals	Flexible cable without cable end	1 conductor	mm²	1...2.5
		2 conductors		1...2.5
	Flexible cable with cable end	1 conductor		1...2.5
		2 conductors		1...2.5
	Solid cable without cable end	1 conductor		1...2.5
		2 conductors		1...2.5
	Tightening torque		N.m	1.2

Characteristics of built in instantaneous contacts

Number of contacts				4
Rated operational voltage (Ue)	Up to		V	690
Rated insulation voltage (Ui)	Conforming to IEC 60947-5-1			690
Conventional thermal current (Ith)	Operational environment temperature ⩽ 40 °C		A	10
Operating current frequency			Hz	50
Minimum switching capacity	U min		V	17
	I min		mA	5
Short-circuit protection	Conforming to IEC 60947-5-1		A	gG fuse: 10 A
Rated making capacity	Conforming to IEC 60947-5-1		A	~: 140
Short-time rating	Permissible for	500 ms	A	120
		100 ms		140
Insulation resistance			mΩ	> 10
Non-overlap time	Guaranteed non-overlap between N/C and N/O contacts		ms	1.5 on energisation and on de-energisation
Tightening torque	Philips n°2		N.m	1.2
Non-overlap distance				Contact LAEN●● connecting with auxiliary contacts

Instantaneous contacts connection

Connecting to screw clamp terminals	Flexible cable without cable end	1 conductor	mm²	1...2.5
		2 conductors		1...2.5
	Flexible cable with cable end	1 conductor		1...2.5
		2 conductors		1...2.5
	Solid cable without cable end	1 conductor		1...2.5
		2 conductors		1...2.5
	Tightening torque		N.m	1.2

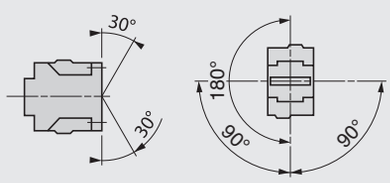Environment			
Type			**CAE~**
Rated insulation voltage (Ui)	Conforming to IEC 60947-5-1	**V**	690
Rated impulse withstand voltage (Uimp)	Conforming to IEC 60947	**kV**	6
Electrical insulation	IEC 60536		Up to 400 V reinforced insulation
Conforming to standards			IEC 60947-5-1
Certifications			EAC
Protective treatment	Conforming to IEC 60068-2-30		IEC60068-2-30 Test Db, Variant 2
Degree of protection	Conforming to IEC 60529		IP2X
Ambient air temperature around the device	Storage	**°C**	-60...+80
	0.85...1.1 UC		-5...+55
	For operation at Uc		-20...+70
Maximum operating altitude	Without derating	**m**	3000
Operating position	Without derating in the following positions		
Shock resistance (1) 1/2 sine ware, 11 ms	Control relay open		7 gn
	Control relay closed		10 gn
Vibration resistance (1) 5...300 Hz	Control relay open		1.5 gn
	Control relay closed		3 gn
Weight		**kg**	0.280

(1) No change of contact state at coil voltage Ue in worst conditions.

Rated operational power of contacts (conforming to IEC 60947-5-1)

a.c.supply. categories AC-14 and AC-15

Electrical durability (valid for up to 3600 operating cycles/hour) on an inductive load such as the coil of an electromagnet:
making current (cos φ0.7) = 10 times the power broken (cos φ0.4).

d.c.supply. categories DC-13


Electrical durability (valid for up to 1200 operating cycles/hour) on an inductive load such as the coil of an electromagnet, without economy resistor, the time constant increasing with the power.

Number of operation cycles


AC-14/AC-15	Volts ~	24 VAC	48 VAC	115 VAC	230 VAC	400 VAC	440 VAC	600 VAC
1 million operating cycles	VA	20	39	94	188	327	360	491
3 million operating cycles	VA	9	18	42	84	146	161	219
10 million operating cycles	VA	3	6	13	26	46	51	69

DC-13	Volts ⎓	24 VDC	48 VDC	125 VDC	250 VDC	400 VDC
1 million operating cycles	W	80	60	50	45	40
3 million operating cycles	W	47	34	25	22	18
10 million operating cycles	W	17	12	10	8	7


CDB500413

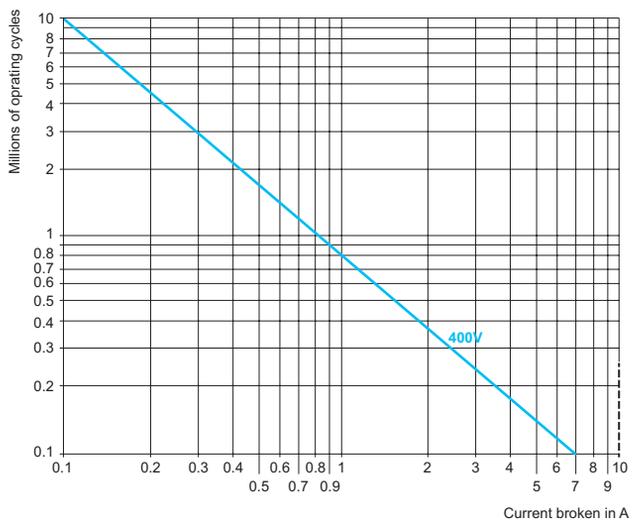

CDB500414

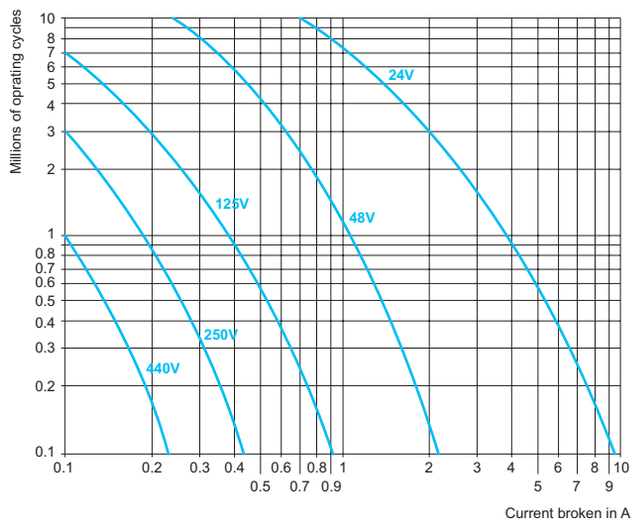


CAE●●

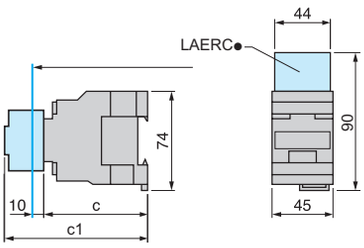

CAE	32	50
c	80	80
c1 with LAEN	113	113


CAE

On mounting plate AM1-P

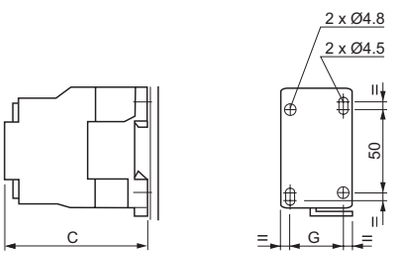


	CAE~
c	80
G	35


CAE40




CAE31



CAE22



EasyPact TVS control relays
Auxiliary contact blocks
RC suppressor

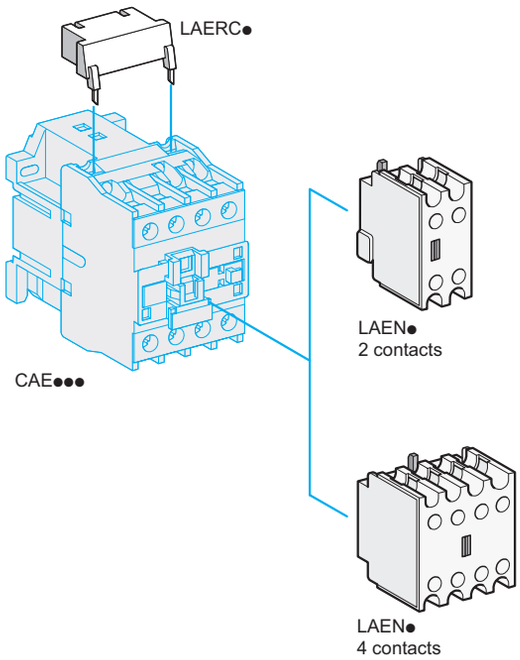

Instantaneous auxiliary contact blocks

For use in normal operating environments (1)

Number of contacts	Maximum number of relays that can be mounted		Composition		Cat. no.	Weight
	Front mounted	Side mounted	NO	NC		kg
2	1	-	1	1	**LAEN11**	0.030
	1	-	2	-	**LAEN20**	0.030
	1	-	-	2	**LAEN02**	0.030
4	1	-	2	2	**LAEN22**	0.050

(1) For use in particularly harsh industrial environments, please consult the auxiliary contact blocks with dust and damp protected contacts in TeSys catalog.


Coil suppressor modules

RC suppressor

■ Effective protection for circuits highly sensitive to "high frequency" interference and transcient generates when the contactor coil is switched off. For use only in cases where the voltage is virtually sinusoidal, i.e. less than 5 % total harmonic distortion.
■ Voltage limited to 3 Uc max. and oscillating frequency limited to 400 Hz max.
■ Slight increase in drop-out time (1.2 to 2 times the normal time).

Mounted on	Operational voltage	Cat. no.	Weight kg
CAE40●●	∿24...48 V	**LAERCE**	0.012
	∿110...240 V	**LAERCU**	0.012
	∿50...120 V	**LAERCG**	0.012
	∿380...415 V	**LAERCN**	0.012

What is MPSD?



MPSD (Motor protective switching device) is

Manually operated motor starter additionally providing resettable short-circuit protection to the motor and the circuit.
Conforming to IEC60947-4-1: 2018.

	MPSD (Motor protective switching devices)	
	Thermal-magnetic protection GZ1E	Magnetic-only protection GZ1LE
Disconnection and breaking Conforming to IEC60947-2	●●●●●	
Short-circuit protection Conforming to IEC60947-2	●●●●●	
Overload protection Conforming to IEC60947-4-1 Rating ajustable overload protection	●●●●● Example: Class 1.05xIr 1.2xIr 1.5xIr 7.2xIr 10A >2hr <2hr <2min 2s - 10s 10 >2hr <2hr <4min 4s - 10s	NO(*)
Control Conforming to IEC60947-4-1 Manual control Adpated electrical durability for AC3 duty	●●●●●	
Coordination capability	●●●●●	

* A separate overload protection is necessary.

MPSD


is the well adapted device to protect your motors with an additional benifit of width saving !

Basic Architecture for your motor management




		Contactors		Soft starters		Drives
Motor starter	Short circuit protection	DOL perferred Direct-on-Line & Star Delta EasyPact TVS MPSD **GZ1E**	EasyPact TVS Magnetic-only MPSD **GZ1LE**	EasyPact TVS MPSD **GZ1E**	EasyPact TVS Magnetic-only MPSD **GZ1LE**	EasyPact TVS Magnetic-only MPSD **GZ1LE**
	Thermal protection		EasyPact TVS TOR **LRE**		Altivar **Altistart 22**	VSD **ATV 320**
	Motor control	EasyPact TVS Contactors **LC1E**	EasyPact TVS Contactors **LC1E**	Altivar **Altistart 01**		

Diagram illustration

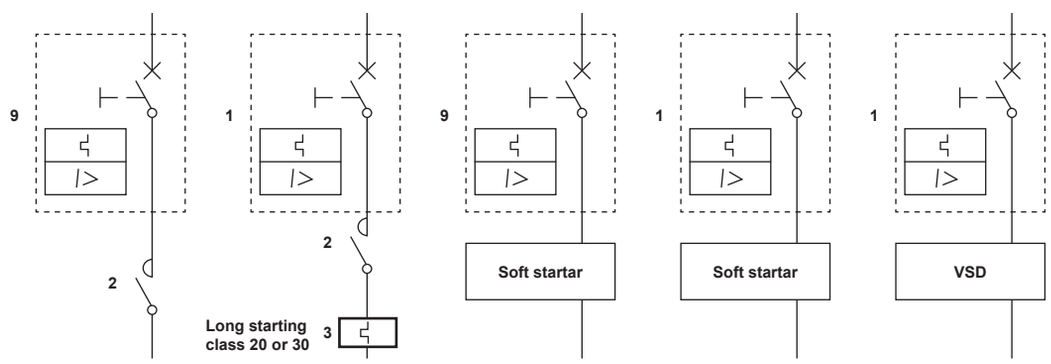

9 Motor protective switching device (MPSD)
1 Circuit breaker according to IEC60947-2
2 Contactor
3 Overload relay

Offer illustration

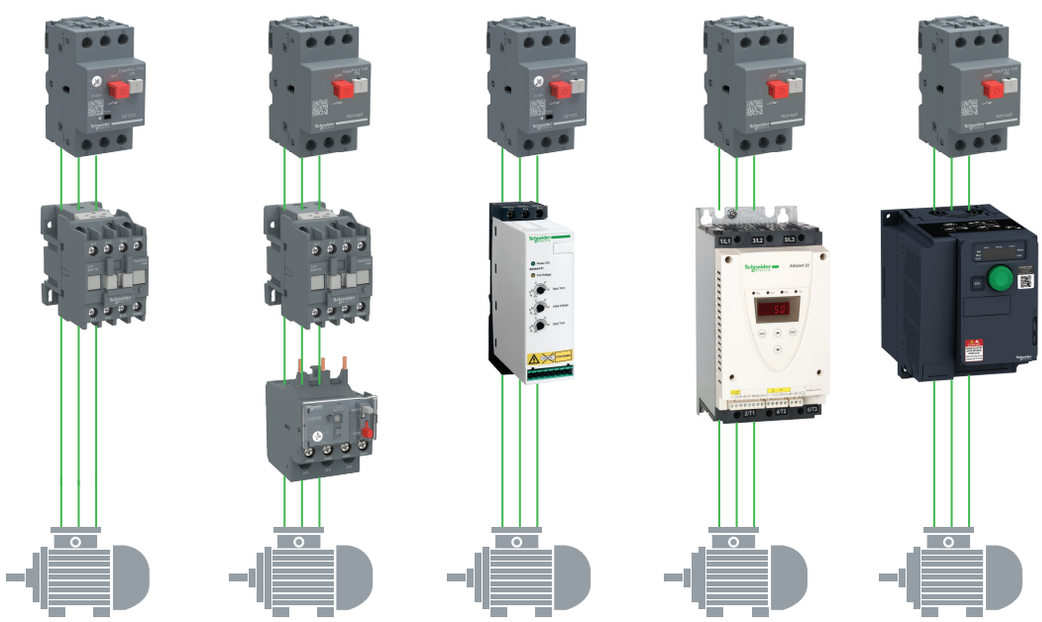

Protection components
Motor circuit breakers GZ1

Circuit breakers for motor protection and control

EasyPact TVS motor circuit breakers GZ1 provide easy and essential solutions for:
- Isolation
- Protection against short circuits and overloads
- On-off manual control of motors up to 15kW

They are conforming to, depending of the versions, IEC 60947-2 and IEC 60947-4-1.

EasyPact TVS protection technologies

Motor circuit breakers GZ1 are carried with 2 variants:
- Thermal-magnetic: GZ1E for protection against short-circuit, overload, phase loss and phase unbalance.
- Magnetic detection: GZ1LE for protection against short-circuit.


With a magnetic circuit breaker, a thermal relay is frequently associated in order to have a short circuit
protection and an overload protection.

GZ1 range overview

Molded case circuit breakers for motor protection and control.



GZ1LE




GZ1E


GZ1

	Protection against		Range	Control	Terminals	Dimensions
	Short-circuits	Overload				(W x H x D)
GZ1LE	●		up to 15kW	Push button	Screw clamp	44.5 x 89 x 66
GZ1E	●	●	up to 15kW	Push button	Screw clamp	44.5 x 89 x 66

Protection components
Motor circuit breakers GZ1



GZ1LE

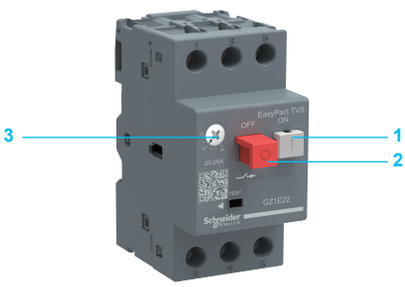

GZ1E

Presentation

Connection


These circuit-breakers are designed for connection by screw clamp terminals. This technique ensures secure, permanent and durable clamping that is resistant to harsh environments, vibration and impact and is even more effective when conductors without cable ends are used. Each connection can take two independent conductors.

Motor ON/OFF pushbutton control

Energisation is controlled manually by operating the Start button “I” **1**.
De-energisation is controlled manually by operating the Stop button “O” **2**, or automatically by the thermal-magnetic protection elements or by a voltage trip attachment.

Protection of motors and personel

For thermal magnetic circuit breakers GZ1E, Motor protection is provided by the thermal-magnetic protection elements incorporated in the motor circuit-breaker.
The magnetic elements (short-circuit protection) have a non-adjustable tripping threshold, which is equal to about 13 times the maximum setting current of the thermal trips.
The thermal elements (overload protection) include automatic compensation for ambient temperature variations.
The rated operational current of the motor is displayed by means of a graduated knob **3**.
For magnetic circuit breakers GZ1LE, motor protection is provided by the magnetic protection elements incorporated in the motor circuit breaker.
Personnel protection is also provided. All live parts are protected against direct finger contact.
GZ1 E motor circuit-breakers are easily installed in any confi guration thanks to their universal fi xing arrangement: screw fi xing or clip-on mounting on symmetrical, asymmetrical or combination rails.



Motor circuit breakers versus fuse protection?

Circuit breakers are a common solution for protecting motor against short circuit s and overloads.
As a comparaison, a fuse based solution can only provide a partial protection depending on the choice of the fuse type and rating. The thermal magnetic circuit breaker is adjustable and can be fine-tuned to the practical motor load.
The fuse based solution offers a very fast protection.

Protection components
Motor circuit breakers GZ1

Environment				
Circuit-breaker type			**GZ1**	
Conforming to standards			IEC 60947-2, IEC 60947-4	
Protective treatment	Conforming to IEC 60068-2-30		IEC60068-2-30 Test Db, Variant 2	
Degree of protection			In **GV2 MC01** enclosure: IP 41 In **GV2 MC02** enclosure: IP 55	
Ambient air temperature	Storage	**°C**	- 40…+ 80	
	Operation		- 20…+ 60	
Flame resistance	Conforming to IEC 60695-2-1	**°C**	960	
Maximum operating altitude		**m**	2000	
Cabling Number of conductors and c.s.a.			**Min.**	**Max.**
	Solid cable	**mm²**	2 x 1	2 x 6
	Flexible cable without cable end	**mm²**	2 x 1.5	2 x 6
	Flexible cable with cable end	**mm²**	2 x 1	2 x 4
Suitable for isolation	Conforming to IEC 60947-1 § 7-1-6		Yes	
Tightening torque		**N.m**	1.7	
Rated operational voltage (Ue)	Conforming to IEC 60947-2	**V**	690	
Rated insulation voltage (Ui)	Conforming to IEC 60947-2	**V**	690	
Rated operational frequency	Conforming to IEC 60947-2	**Hz**	50/60	
Rated impulse withstand voltage (U imp)	Conforming to IEC 60947-2	**kV**	6	
Total power dissipated per pole		**W**	2.5	
Mechanical durability (C.O.: closing, opening)		**C.O.**	100 000	
Electrical durability	For AC-3 duty	**C.O.**	100 000	
Duty class (maximum operating rate)		**C.O./h**	25	

Protection components
Motor circuit breakers GZ1


Breaking capacity

Circuit-breaker type				GZ1								
				01 to 06	07	08	10	14	16	20	21	22 to 32
Rating			A	0.1 to 1.6	2,5	4	6.3	10	14	18	23	25 to 32
Breaking capacity	230/240 V	Icu	kA	★	★	★	★	★	★	★	30	30
conforming to IEC 60947-2		Ics % (1)		★	★	★	★	★	★	★	100	100
	400/415 V	Icu	kA	★	★	★	★	★	10	10	10	10
		Ics % (1)		★	★	★	★	★	50	50	40	40
	440 V	Icu	kA	★	★	★	30	10	6	6	5	5
		Ics % (1)		★	★	★	100	100	50	50	50	50
	500 V	Icu	kA	★	★	★	30	8	5	5	3	3
		Ics % (1)		★	★	★	100	100	75	75	75	75
	690 V	Icu	kA	★	2	2	2	2	2	2	2	2
		Ics % (1)		★	75	75	75	75	75	75	75	75

★ > 100 kA.
(1) As % of Icu.


Tripping curves

Average operating times at 20 °C related to multiples of the setting current

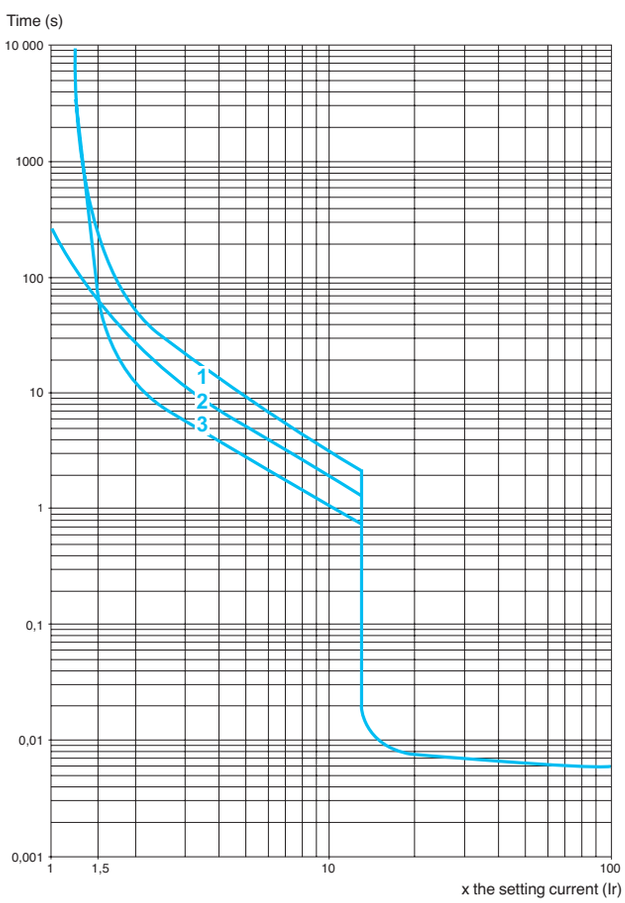

1 3 poles from cold state
2 2 poles from cold state
3 3 poles from hot state

Protection components
Magnetic motor circuit breaker
GZ1LE




GZ1LE

Motor circuit-breakers

Pushbutton control

Standard power ratings of 3-phase motors 50/60 Hz in category AC-3					Magnetic protection rating	Magnetic tripping current Id ± 20 %	Use in association with thermal overload relays	Reference	Weight
230V	400V	440V	500V	690V					
kW	kW	kW	kW	kW	A	A	(Class 10A)		kg
–	–	–	–	–	0.40	5	LRE03	**GZ1LE03**	0.250
–	–	–	–	0.37	0.63	8	LRE04	**GZ1LE04**	0.250
–	–	–	0.37	0.55	1	13	LRE05	**GZ1LE05**	0.250
–	0.37	0.55	0.75	1.1	1.6	22.5	LRE06	**GZ1LE06**	0.250
0.37	0.75	1.1	1.1	1.5	2.5	33.5	LRE07	**GZ1LE07**	0.250
0.75	1.5	1.5	2.2	3	4	51	LRE08	**GZ1LE08**	0.250
1.1	2.2	3	3.7	4	6.3	78	LRE10	**GZ1LE10**	0.250
2.2	4	4	5.5	7.5	10	138	LRE14	**GZ1LE14**	0.250
–	5.5	5.5	9	11	14	170	LRE16	**GZ1LE16**	0.250
4	7.5	9	10	15	18	223	LRE21	**GZ1LE20**	0.250
5.5	11	11	15	22	25	327	LRE22	**GZ1LE22**	0.250
7.5	15	15	18.5	22	32	416	LRE32	**GZ1LE32**	0.250

Protection components
Thermal-magnetic motor circuit breakers
GZ1 E




GZ1E

Motor circuit-breakers


Pushbutton control

Standard power ratings of 3-phase motors 50/60 Hz in category AC-3					Setting range of thermal trips	Magnetic tripping current Id ± 20 %	Reference	Weight
230V	400V	440V	500V	690V				
kW	kW	kW	kW	kW	A	A		kg
–	–	–	–	–	0.1…0.16	1.5	**GZ1 E01**	0.260
–	–	–	–	–	0.16…0.25	2.4	**GZ1 E02**	0.260
–	–	–	–	–	0.25…0.40	5	**GZ1 E03**	0.260
–	–	–	–	0.37	0.40…0.63	8	**GZ1 E04**	0.260
–	–	–	0.37	0.55	0.63…1	13	**GZ1 E05**	0.260
–	0.37	0.55	0.75	1.1	1…1.6	22.5	**GZ1 E06**	0.260
0.37	0.75	1.1	1.1	1.5	1.6…2.5	33.5	**GZ1 E07**	0.260
0.75	1.5	1.5	2.2	3	2.5…4	51	**GZ1 E08**	0.260
1.1	2.2	3	3.7	4	4…6.3	78	**GZ1 E10**	0.260
2.2	4	4	5.5	7.5	6…10	138	**GZ1 E14**	0.260
–	5.5	5.5	9	11	9…14	170	**GZ1 E16**	0.260
4	7.5	9	10	15	13…18	223	**GZ1 E20**	0.260
5.5	9	11	11	18.5	17…23	327	**GZ1 E21**	0.260
5.5	11	11	15	22	20…25	327	**GZ1 E22**	0.260
7.5	15	15	18.5	22	24…32	416	**GZ1 E32**	0.260

Protection components
Motor circuit breakers GZ1



GZ1 AN11



GZ1 AS115

Contact blocks

Instantaneous auxiliary contacts


Mounting	Maximum number	Type of contacts	Sold in lots of	Unit reference	Weight kg	Tightening torque
Side	2	N/O + N/C	1	**GZ1 AN11**	0.050	1.2
LH side		N/O + N/O	1	**GZ1 AN20**	0.050	1.2

Electric trips


Montage	Type	Tension		Reference	Weight kg	Tightening torque
Side (1 block on RH side of circuit-breaker)	Undervoltage trip	110…115 V	50 Hz	**GZ1 AU115**	0.105	1.2
		220…240 V	50 Hz	**GZ1 AU225**	0.105	1.2
		380…400 V	50 Hz	**GZ1 AU385**	0.105	1.2
	Shunt trip	110…115 V	50 Hz	**GZ1 AS115**	0.105	1.2
		220…240 V	50 Hz	**GZ1 AS225**	0.105	1.2


Mounting accessory

Descrip-tion	Application	Sold in lots of	Unit reference	Weight kg
Adapter plate	For screw fixing of a GZ1	10	**GV2 AF02**	0.021

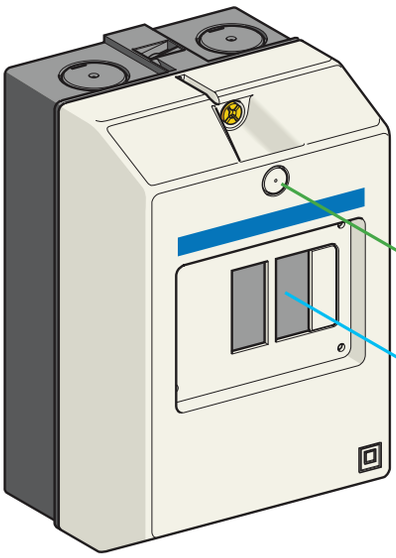


GV2 MC




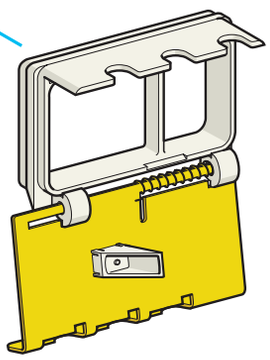


GV2 V01

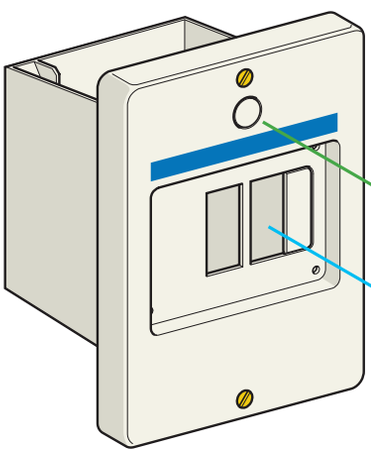



GV2 MP






GV2 K011






GV2 E01

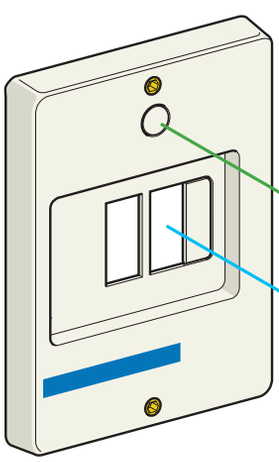

GV2 CP



GV2 SN

Protection components
Motor circuit breakers GZ1

Enclosures for thermal-magnetic circuit-breakers GZ1

Type	Degree of protection	Reference	Weight kg
Surface mounting, double insulated, with protective earth Sealable cover	IP 41	**GV2 MC01**	0.290
	IP 55	**GV2 MC02**	0.300
Flush mounting, with protective earth	IP 41 (front face)	**GV2 MP01**	0.115
	IP 55 (front face)	**GV2 MP02**	0.130

Front plate

Description	Degree of protection	Sold in lots of	Unit reference	Weight kg
For direct control, through a panel, of a chassis mounted GZ1	IP 55	1	**GV2 CP21**	0.800

Accessories common to all enclosures (to be ordered separately)

Padlocking device [(1)] **for GZ1 operator** (padlocking is only possible in the “O” position)	1 to 3 padlocks Ø 4 to 8 mm		1	**GV2 V01**	0.075
Mushroom head “Stop” pushbutton, Ø 40 mm, red	Spring return [(1)]		1	**GV2 K011**	0.052
Sealing kit	For enclosures and front plate	IP 55	10	**GV2 E01**	0.012
Neutral terminal			100	**AB1 VV635UBL**	0.015
Partition			50	**AB1 AC6BL**	0.003


Description	Voltage V	Colour	Sold in lots of	Unit reference	Weight kg
Pilot light with neon bulb	380/440	Green	10	**GV2 SN33**	0.019
		Red	10	**GV2 SN34**	0.019
		Orange	10	**GV2 SN35**	0.019
		Clear	10	**GV2 SN37**	0.019

(1) Supplied with IP 55 sealing kit. To be fitted with enclosures **GV2 M●01**.

Protection components
Motor circuit breakers GZ1


Dimensions

GZ1

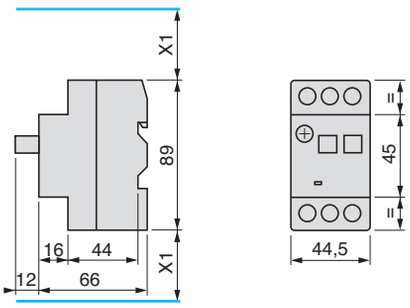

X1: electrical clearance = 40 mm for Ue y 690 V.


GZ1 AN, GZ1 AU, GZ1 AS

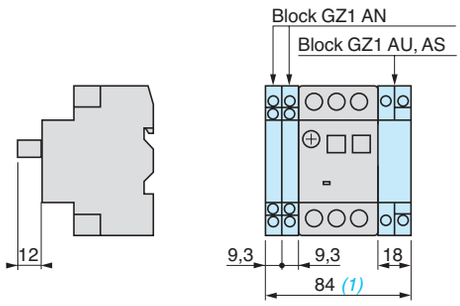

(1) max.


Mounting

GZ1 on 35 mm ⩽ rail

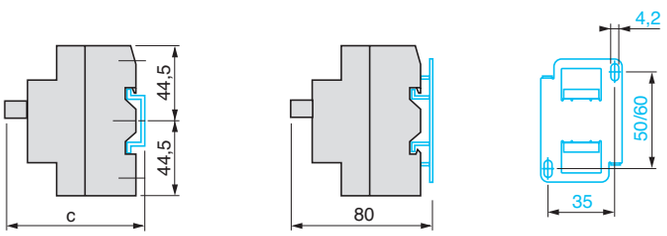


c = 78.5 on AM1 DP200 (35 x 7.5).
c = 86 on AM1 DE200 and AM1 ED200 (35 x 15).

GZ1 on pre-slotted mounting plate




GZ1 on rails DZ5 MB201, DZ5 ME8 or GV2 AF02



Protection components
Motor circuit breakers
GZ1, in enclosure


Dimensions

Surface mounting enclosure GV2 MC0●

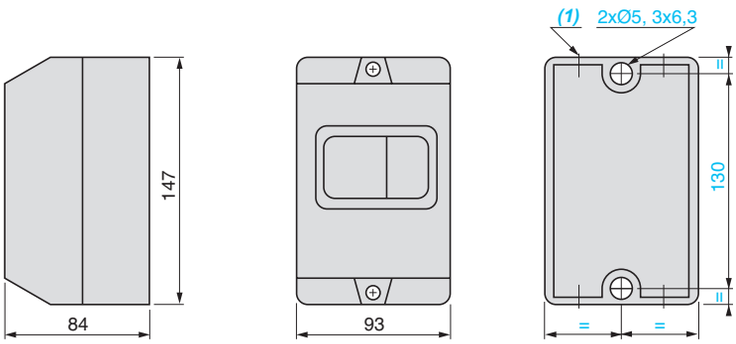


(1) 4 knock-outs for 16 mm plastic cable gland or 16 mm conduit.

Front plate GV2 CP21

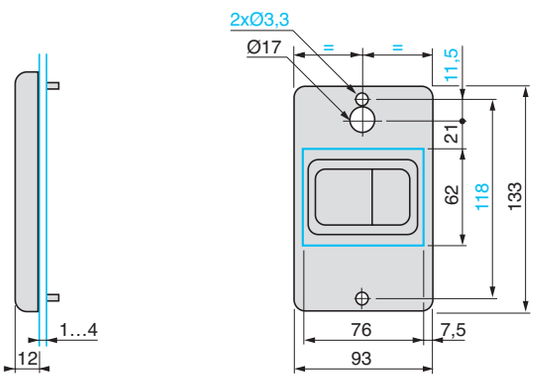

Flush mounting enclosures GV2 MP01 and GV2 MP02

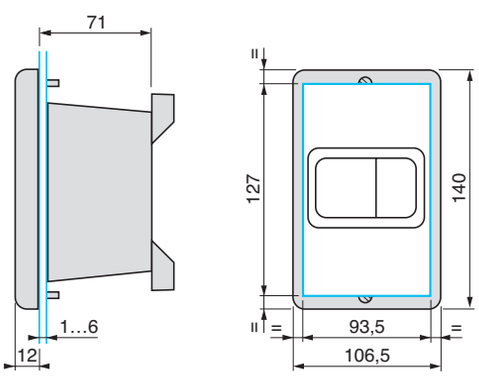

Coordination between protection & control components

Coordination: safety and faster restart after a short circuit

This benefit is obtained by choosing contactors with Schneider Electric guaranteed coordination.

What exactly is coordination?

A contactor is said to be "coordinated" with the upstream protection device when its behaviour is controlled in the event of a short circuit. This behaviour of Type 1 coordination can be:

> Guaranteed not to pose a danger to the workforce and not to damage the installation. It is accepted that the contactor should be destroyed or repaired.

Compliance tests

Only the very stringent certified tests performed by Schneider Electric can guarantee the behaviour described by IEC 60947-4-1.

EasyPact TVS LC1E06 to 630
Type 1 coordination (IEC 60947-4-1)
400 - 440 V

Direct on line starter

Motors					Switch-fuse [1]	Fuse-link type:	Fuse size	Switch-Fuse	Fuse-link type:	Fuse size	Contactors	Thermal o/l relays:	
	400V		440V										
P(KW)	Ie	P(KW)	Ie	Ie max	Type	gG cal(A)		Type	aM cal(A)		Type	Type	Ith
0,06	0,2	**0,06**	0,19	0,25	GS* G	4	T000	GS* G	2	T000	LC1E06	LRE02	0.16..0.25
0,09	0,3	**0,09**	0,28	0,4	GS* G	4	T000	GS* G	2	T000	LC1E06	LRE03	0.25..0.4
-	-	**0,12**	0,37	0,63	GS* G	4	T000	GS* G	2	T000	LC1E06	LRE04	0.4..0.63
0,12	0,44	**-**	-	1	GS* G	4	T000	GS* G	2	T000	LC1E06	LRE05	0.63..1
0,18	0,6	**0,18**	0,55	1	GS* G	4	T000	GS* G	2	T000	LC1E06	LRE05	0.63..1
0,37	1,1	**0,37**	1	1,6	GS* G	4	T000	GS* G	2	T000	LC1E06	LRE06	1..1,6
0,55	1,5	**0,55**	1,36	1,6	GS* G	6	T000	GS* G	2	T000	LC1E06	LRE06	1..1,6
0,75	1,9	**0,75**	1,68	2,5	GS* G	10	T000	GS* G	4	T000	LC1E06	LRE07	1,6..2,5
-	-	**1,1**	2,37	2,5	GS* G	10	T000	GS* G	4	T000	LC1E06	LRE07	1,6..2,5
1,1	2,7	**-**	-	4	GS* G	10	T000	GS* G	4	T000	LC1E06	LRE08	2,5..4
1,5	3,6	**1,5**	3,06	4	GS* G	16	T000	GS* G	4	T000	LC1E06	LRE08	2,5..4
2,2	4,9	**2,2**	4,42	6	GS* G	16	T000	GS* G	6	T000	LC1E06	LRE10	4..6
3	6,5	**3**	5,77	8	GS* G	20	T000	GS* G	8	T000	LC1E09	LRE12	5,5..8
4	8,5	**4**	7,9	9	GS* G	25	T000	GS* G	12	T000	LC1E09	LRE14	7..10
5,5	11,5	**5,5**	10,4	12	GS* G	32	T000	GS* G	16	T000	LC1E12	LRE16	9..13
7,5	15,5	**7,5**	13,7	18	GS* G	40	T000	GS* G	16	T000	LC1E18	LRE21	12..18
9	18,1	**9**	16,9	24	GS* G	50	T000	GS* G	25	T000	LC1E25	LRE22	16..24
11	22	**11**	20,1	24	GS* G	50	T000	GS* G	25	T000	LC1E25	LRE22	16..24
15	29	**15**	26,5	32	GS* G	80	T000	GS* G	32	T000	LC1E32	LRE32	23..32
18,5	35	**18,5**	32,8	40	GS* G	80	T000	GS* G	40	T000	LC1E40	LRE355	30..40
22	41	**22**	39	50	GS* G	100	T000	GS* G	50	T000	LC1E50	LRE357	37..50
30	55	**30**	51,5	65	GS* KK	125	T00	GS* KK	80	T00	LC1E65	LRE359	48..65
37	66	**37**	64	70	GS* KK	160	T00	GS* KK	100	T00	LC1E80	LRE361	55..70
-	-	**45**	76	80	GSx L	200	T0	GS* KK	100	T00	LC1E80	LRE363	63..80
45	80	**-**	-	95	GSx L	200	T0	GS* KK	100	T00	LC1E95	LRE365	80..104
55	97	**55**	90	120	GSx L	200	T0	GS* L	125	T0	LC1E120	LRE482	84..135
75	132	**75**	125	160	GSx N	250	T1	GS* L	160	T0	LC1E160	LRE483	124..198
90	160	**90**	146	200	GSxQQ	350	T2	GS* N	200	T1	LC1E200	LRE483	124..198
110	195	**110**	178	234	GSxQQ	400	T2	GS* N	250	T1	LC1E250	LRE484	146..234
132	230	**132**	215	234	GS2 S	450	T3	GS* QQ	315	T2	LC1E250	LRE484	146..234
160	280	**160**	256	300	GS2 S	630	T3	GS* QQ	400	T2	LC1E300	LRE486	208..333
200	350	**200**	391	400	GS2 S	500	T3	GS*QQ	400	T3	LC1E400	LRE487	259….414
250	430	**250**	461	500	GS2 S	800	T3	GS*QQ	500	T3	LC1E500	LRE488	321….513
335	574	**335**	627	630	GS2 S	1000	T3	GS*QQ	630	T3	LC1E630	LRE489	394….630

(1) Proposed Switch-Fuse are for Blade fuse type. Other fuse type and according switch-fuse can be used.

EasyPact TVS LC1E06 to 300
Type 1 coordination (IEC 60947-4-1) with Switch Fuse
400 - 440 V

Star-delta starter

Motors							Switch-fuse (1)	Fuse-link type:	Fuse size	Switch-Fuse	Fuse-link type:	Fuse size	Line contactor	Delta contactor	Star contactor	Thermal o/l relays:	
	400V			440V													
P (KW)	Ie	I rD	P (KW)	Ie	IrD	Ie max	Type	gG cal(A)		Type	aM cal(A)		Type	Type	Type	Type	Ith
1,5	3,6	2,08	**1,5**	3,06	1,8	4	GS* G	10	T000	GS* G	4	T000	LC1E06	LC1E06	LC1E06	LRE07	1,6..2,5
2,2	4,9	2,83	**2,2**	4,42	2,6	6	GS* G	16	T000	GS* G	6	T000	LC1E06	LC1E06	LC1E06	LRE08	2,5..4
3	6,5	3,75	**3**	5,77	3,3	8	GS* G	16	T000	GS* G	8	T000	LC1E06	LC1E06	LC1E06	LRE08	2,5..4
4	8,5	4,9	**4**	7,9	4,6	10	GS* G	20	T000	GS* G	12	T000	LC1E06	LC1E06	LC1E06	LRE10	4..6
-	-	-	**5,5**	10,4	6	12	GS* G	20	T000	GS* G	16	T000	LC1E06	LC1E06	LC1E06	LRE10	4..6
5,5	11,5	6,64	**-**	-	-	16	GS* G	20	T000	GS* G	16	T000	LC1E09	LC1E09	LC1E09	LRE14	7..10
7,5	15,5	8,95	**7,5**	13,7	7,9	16	GS* G	32	T000	GS* G	16	T000	LC1E09	LC1E09	LC1E09	LRE14	7..10
9	18,1	10,5	**9**	16,9	9,8	20	GS* G	32	T000	GS* G	25	T000	LC1E12	LC1E12	LC1E09	LRE16	9..13
11	22	12,7	**11**	20,1	12	24	GS* G	50	T000	GS* G	25	T000	LC1E18	LC1E18	LC1E09	LRE21	12..18
15	29	16,7	**15**	26,5	15	32	GS* G	63	T000	GS* G	32	T000	LC1E18	LC1E18	LC1E09	LRE21	12..18
18,5	35	20,2	**18,5**	32,8	19	40	GS* G	80	T000	GS* G	40	T000	LC1E25	LC1E25	LC1E09	LRE22	16..24
22	41	23,7	**22**	39	23	43	GS* G	80	T000	GS* G	50	T000	LC1E25	LC1E25	LC1E09	LRE32	23..32
30	55	31,8	**30**	51,5	30	55	GS* KK	100	T00	GS* KK	80	T00	LC1E32	LC1E32	LC1E18	LRE35	30..38
37	66	38,1	**37**	64	37	70	GS* KK	125	T00	GS* KK	100	T00	LC1E40	LC1E40	LC1E40	LRE355	30..40
45	80	46,2	**45**	76	44	85	GSx L	160	T0	GS* KK	100	T00	LC1E50	LC1E50	LC1E40	LRE357	37..50
55	97	56	**55**	90	52	110	GSx L	200	T0	GS* L	125	T0	LC1E65	LC1E65	LC1E40	LRE359	48..65
75	132	76,2	**75**	125	72	140	GSx N	250	T1	GS* L	160	T0	LC1E80	LC1E80	LC1E65	LRE365	80..104
90	160	92,4	**90**	146	84	165	GSxQQ	350	T2	GS* N	200	T1	LC1E95	LC1E95	LC1E80	LRE365	80..104
110	195	113	**110**	178	103	210	GSxQQ	400	T2	GS* N	250	T1	LC1E120	LC1E120	LC1E95	LRE482	84..135
132	230	133	**132**	215	124	280	GS2 S	450	T3	GS* QQ	315	T2	LC1E160	LC1E160	LC1E120	LRE483	124..198
160	280	162	**160**	256	148	300	GS2 S	500	T3	GS* QQ	315	T2	LC1E200	LC1E200	LC1E160	LRE483	124..198
220	388	224	**220**	350	202	405	GS2 S	630	T3	GS* QQ	400	T2	LC1E250	LC1E250	LC1E200	LRE484	146..234
260	480	277	**220**	430	248	500	GS2 S	800	T3	GS2 S	500	T3	LC1E300	LC1E300	LC1E250	LRE486	208..333

(1) Proposed Switch-Fuse are for Blade fuse type. Other fuse type and according switch-fuse can be used.


EasyPact TVS LC1E09 to 32
Type 1 coordination (IEC 60947-4-1) with Circuit Breaker GZ1E
440 V

0.06kW to 15kW at 440V: Type 1 coordination					
Standard power ratings of 3-phase motors 50/60 Hz in Category AC-3			**Circuit-breaker**		**Contactor**
440V			**Reference**	**Setting range of thermal trips**	**Reference**
P	**Ie**	**Iq**			
kW	**A**	**kA**		**A**	
0.06	0.19	50	GZ1E02	0.16…0.25	LC1E09
0.09	0.28	50	GZ1E03	0.25…0.40	LC1E09
0.12	0.37	50			
0.18	0.55	50	GZ1E04	0.40…0.63	LC1E09
0.25	0.76	50	GZ1E05	0.63…1	LC1E09
0.37	0.99	50			
0.55	1.36	50	GZ1E06	1…1.6	LC1E09
0.75	1.68	50	GZ1E07	1.6…2.5	LC1E09
1.1	2.37	50			
1.5	3.06	50	GZ1E08	2.5…4	LC1E09
2.2	4.42	50	GZ1E10	4…6.3	LC1E09
3	5.77	50			
4	7.9	15	GZ1E14	6…10	LC1E09
5.5	10.5	8	GZ1E16	9…14	LC1E12
7.5	13.7	8	GZ1E20	13…18	LC1E18
9	16.9	8			
11	20.1	6	GZ1E21	17…23	LC1E25
			GZ1E22	20…25	LC1E25
15	26.5	6	GZ1E32	24…32	LC1E32

Glossary

Altitude	The rarefied atmosphere at high altitude reduces the dielectric strength of the air and hence the rated operational voltage of the contactor. It also reduces the cooling effect of the air and hence the rated operational current of the contactor (unless the temperature drops at the same time). No derating is necessary up to 3000 m. Derating factors to be applied above this for main pole operational voltage and current (a.c.supply) are as follows:

Altitude	3500m	4000m	4500m	5000m
Rated operational voltage	0.90	0.80	0.70	0.60
Rated operational current	0.92	0.90	0.88	0.86

Ambient air temperature	The temperature of the air surrounding the device, measured near to the device. The operating characteristics are given: ■ with no restriction for temperatures between -5 and +55 °C ■ with restrictions, if necessary, for temperatures between -20 and +70 °C. Please consult your local Schneider Electric office.
Rated operational current (Ie)	This is defined taking into account the rated operational voltage, operating rate, ulilisation category and ambient temperature around the device.
Conventional thermal current (Ith) (1)	The current which a closed contactor can sustain for a minimum of 8 hours without its temperature rise exceeding the limits given in the standards.
Permissible short-time rating	The current which a closed contactor can for a short time after a period of no load, without dangerous overheating.
Rated operational voltage (Ue)	This is the voltage value which, in conjunction with the rated operational current, determines the use of the contactor or starter, and on which the corresponding tests and the utilisation category are based. For 3-phase circuits, it is expressed as the voltage between phases.
Rated control circuit voltage (Uc)	The rated value of the control circuit voltage, on which the operating characteristics are based. For a.c. applications, the values are given for a sinusoidal wave form (less than 5% total harmonic distortion).
Rated insulation voltage (Ui)	This is the voltage value used to define the insulation characteristics of a device and referred to in dielectric tests determining leakage paths. As the specifications are not identical for all standards, the rated value given for each of them is not necessarily the same.
Rated impulse withstand voltage (Uimp)	The peak value of a voltage surge which the device is able to withstand without breaking down.
Rated operational power (expressed in kW)	The rated power of the standard motor which can be switched by the contactor, at the rated operational voltage.
Rated breaking capacity (2)	This is the current value which the contactor can break in accordance with the breaking conditions specified in the IEC standard.
Rated making capacity (2)	This is the current value which the contactor can make in accordance with the making conditions specified in the IEC standard.
On-load factor (m)	This is the ratio between the time the current flows (t) and the duration of the cycle (T).  m=t/T Cycle duration: duration of current flow + time at zero current.
Pole impedance	The impedance of one pole is the sum of the impedance of all the circuit components between the input terminal and the output terminal. The impedance comprises a resistive component (R) and an inductive component ($X = L\omega$). The total impedance therefore depends on the frequency and is normally given for 50 Hz. This average value is given for the pole at its rated operational current.
Electrical durability	This is the average number of on-load operating cycles which the main pole contacts can perform without maintance. The electrical durability depends on the utilisation category, the rated operational current and the rated operational voltage.
Mechanical durability	This is the average number of no-load operating cycles (i.e. with zero current flow through the main pole) which the contactor can perform without mechanical failure.

(1) Conventional thermal current, in free air, conforming to IEC standards.
(2) For a.c. applications, the breaking and making capacities are expressed by rms value of the symmetrical component of the short-circuit current. Taking into account the maximum asymmetry which may exist in the circuit, the contacts therefore have to withstand a peak asymmetrical current which may be twice the rms symetrical component.

***Note:** these definitions are extracted from standard IEC 60947-1.*

Definitions

Contactor utilisation categories conforming to IEC 60947-4

The standard utilisation categories define the current values which the contactor must be able to make or break.
These values depend on:
■ the type of load being switched: squirrel cage or slip ring motor, resistors
■ the conditions under which making or breaking takes place: motor stalled, starting or running, reversing, plugging.

a.c. applications
■ **Category AC-1**:
This category applies to all types of a.c. load with a power factor equal to or greater than 0.95.
Examples: heating, lighting, distribution.
■ **Category AC-3**:
This category applies to squirrel cage motors with breaking during normal running of the motor. On closing, the contactor makes the starting current, which is about 7 times the rated current of the motor.
On opening, it breaks the rated current drawn by the motor; at this point, the voltage at the contactor terminals is about 20 % of the mains supply voltage. Breaking is light. For example: all standard squirrel cage motors: lifts, escalators, conveyor belts, bucket elevators, compressors, pumps, mixers, air condition units, etc...
■ **Category AC-4**:
The contactor closes at a current peak which may be as high as 5 or 7 times the rated motor current. On opening it breaks this same current at a voltage which is higher, the lower the motor speed. This voltage can be the same as the mains voltage. Breaking is severe.
This category covers applications with plugging and inching of squirrel cage and slip ring motors.
For example: printing machines, wire drawing machines, cranes and hoists, metallurgy industry.

Technical information
Current of asynchronous squirrel cage motors at nominal load

3-phase 4-pole motors				
Current values for power in kW				
Rated operational power *(1)*	**Indicative rated operational current values at:**			
	230 V	**400 V**	**500 V**	**690 V**
kW	**A**	**A**	**A**	**A**
0.06	0.35	0.2	0.16	0.12
0.09	0.52	0.3	0.24	0.17
0.12	0.7	0.44	0.32	0.23
0.18	1	0.6	0.48	0.35
0.25	1.5	0.85	0.68	0.49
0.37	1.9	1.1	0.88	0.64
0.55	2.6	1.5	1.2	0.87
0.75	3.3	1.9	1.5	1.1
1.1	4.7	2.7	2.2	1.6
1.5	6.3	3.6	2.9	2.1
2.2	8.5	4.9	3.9	2.8
3	11.3	6.5	5.2	3.8
4	15	8.5	6.8	4.9
5.5	20	11.5	9.2	6.7
7.5	27	15.5	12.4	8.9
11	38	22	17.6	12.8
15	51	29	23	17
18.5	61	35	28	21
22	72	41	33	24
30	96	55	44	32
37	115	66	53	39
45	140	80	64	47
55	169	97	78	57
75	230	132	106	77
90	278	160	128	93
110	340	195	156	113
132	400	230	184	134
160	487	280	224	162
200	609	350	280	203
250	748	430	344	250
315	940	540	432	313
355	1061	610	488	354
400	1200	690	552	400
500	1478	850	680	493
560	1652	950	760	551
630	1844	1060	848	615
710	2070	1190	952	690
800	2340	1346	1076	780
900	2640	1518	1214	880
1000	2910	1673	1339	970

(1) Values conforming to standard IEC60072-1 (at 50Hz).

Note: *These values are given as a guide. They may vary depending on the type of motor, its polarity and the manufacturer.*

Technical information
Product standards and certifications

Standardisation

Conformity to standards

Schneider Electric products satisfy, in the majority of cases, European (for example: CENELEC) or international (IEC) standards. These product standards precisely define the performance of the designated products (such as IEC 60947 for low voltage equipment).
When used correctly, as designated by the manufacturer and in accordance with regulations and correct practices, these products will allow users to build equipment, machine systems or installations that conform to their appropriate standards (for example: IEC 60204-1, relating to electrical equipment used on industrial machines).
Schneider Electric is able to provide proof of conformity of its production to the standards it has chosen to comply with, through its quality assurance system.
On request, and depending on the situation, Schneider Electric can provide the following:
■ a declaration of conformity
■ a certificate of conformity
■ a homologation certificate or approval, in the countries where this procedure is required or for particular specifications, such as those existing in the merchant navy.

Code	Certification authority		Country
	Name	Abbreviation	
EAC	Eurasian Conformity	EAC	Russia
IEC	International Electrotechnical Commission	IEC	Worldwide

Regulations

European Directives

Opening up of European markets assumes harmonisation of the regulations pertaining to each of the member countries of the European Union.
The purpose of the European Directive is to eliminate obstacles hindering the free circulation of goods within the European Union, and it must be applied in all member countries. Member countries are obliged to transcribe each Directive into their national legislation and to simultaneously withdraw any contradictory regulations.
The Directives, in particular those of a technical nature which concern us, only establish the objectives to be achieved, referred to as “essential requirements”.
The manufacturer must take all the necessary measures to ensure that his products conform to the requirements of each Directive applicable to his production.
As a general rule, the manufacturer certifies conformity to the essential requirements of the Directive(s) for his product by affixing the CE marking.
The CE marking is affixed to Schneider Electric brand products concerned, in order to comply with French and European regulations.

Significance of the CE marking

■ The CE marking affixed to a product signifies that the manufacturer certifies that the product conforms to the relevant European Directive(s) which concern it; this condition must be met to allow free distribution and circulation within the countries of the European Union of any product subject to one or more of the E.U. Directives.
■ The CE marking is intended solely for national market control authorities.
■ The CE marking must not be confused with a conformity marking.

European Directives (continued)

For electrical equipment, only conformity to standards signifies that the product is suitable for its designated function, and only the guarantee of an established manufacturer can provide a high level of quality assurance.
For Schneider Electric brand products, one or several Directives are likely to be applicable, depending on the product, and in particular:
■ the Low Voltage Directive 2014/35/EU: the CE marking relating to this Directive has been compulsory since 16th January 2007.
■ the Electromagnetic Compatibility Directive 2014/30/EU.

Note

For further details on a specific product, please refer to the "Characteristics" pages in this catalogue or consult your Regional Sales Office.

Life Is On | Schneider Electric

Schneider Electric Industries SAS

35, rue Joseph Monier
CS 30323
F - 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439
Capital social 896 313 776 €
www.se.com

1, Apr, 2020
Document Number LVED212071EN

© 2020 - Schneider Electric. All Rights Reserved.
All trademarks are owned by Schneider Electric Industries SAS or its affiliated companies.
Document reference

This document has been printed on recycled paper